


All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters $\varnothing 0.1$   A	Angles $\pm 2^\circ$ Drilled holes $+0.25 -0$ All sharp edges removed R0.2 $+0.2$ Inside and Outside deburred Surface roughness max. Ra 3.2	Stroke Tol. $+1.8$ $-1.6$
Up to	6	30	120	400	1000	2500			
Tol.	$\pm 0.1$	$\pm 0.2$	$\pm 0.3$	$\pm 0.5$	$\pm 0.8$	$\pm 1.2$			

	Drawn		Pressure	250 bar
	Cust. Ref.		Weight	3.09 kg
Item	CFGY0072038		Reference	0324873
Description	C2S.30.20.272 GK15DO~GK15DO			
Finish	Primer & RAL7016 Anthracite-grey High-Gloss			



CFGCY0072038 - C2S.30.20.272 GK15DO~GK15DO

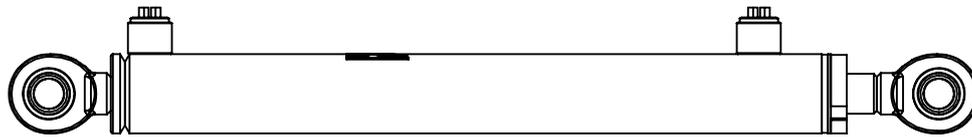

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 40 x 30 ST52-H10 CB 40-5H10 L=0.353	1
LSN04E	2	Welding-stud 1/4" BSP	2
DC3903001	3	Endcap C2/C3/P2 - Bore 30	1
GK15DO	4	Spherical-bearing GK 15 DO	2
MDL-090346	5	Rod - Hard Chrome Shaft 20 - HAC20 L=0.375	1
DS2903013020	6	Cylinder-head C2 - Bore 30 - Rod 20 - 250 bar	1
ASU2028653	7	Scraper 20 x 28.6 x 5.3	1
SA202857UN	8	Rod-seal 20 x 28 x 5.7 UN	1
BU2507262	9	Backup-ring 25.86 x 2.18 x 1.14	1
OR250726290P001	10	O-ring 25.07 x 2.62 - 90'-shore	1
OR2982262	11	O-ring 29.82 x 2.62	1
DS2903004	12	Cylinder-piston C2 - Bore 30	1
ZA3021135DBM	13	Piston-seal 30 x 21 x 13.5/2.1	1
MDL-020787	14		1
SLBMM1215	15	Seallock-nut M12x1.5 Ø30mm	1
SP04M	16	Dust plug outer thread 1/4" BSP	2