

All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask						
Above	-	6	30	120	400	1000
Up to	6	30	120	400	1000	2500
Tol.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2


All diameters $\text{Ø } 0.1 \text{ A}$
 Angles $\pm 2^\circ$ Drilled holes $+0.25 -0$
 All sharp edges removed $R0.2 +0.2$
 Inside and Outside deburred
 Surface roughness max. $Ra 3.2$

Stroke
Tol. $+1.8$
 -1.6

	Drawn		Pressure	250 bar
	Cust. Ref.	KPS Bauchschwinge	Weight	7.65 kg
Item	CFGY0063933	Reference	0324437	
Description	C2S.50.30.330 Bodem/Gat-Bus/45			
Finish	Primer & RAL7021 Black-grey High-Gloss			



CFGCY0063933 - C2S.50.30.330 Bodem/Gat~Bus/45

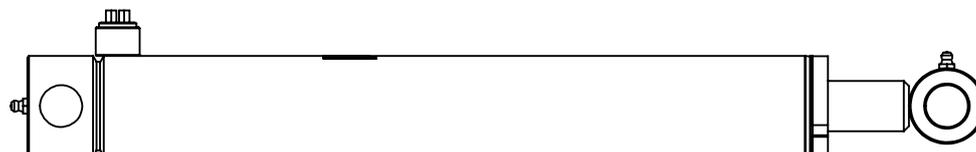

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 60 x 50 ST52-H10 CB 60-5H10 L=0.422	1
LSN06E	2	Welding-stud 3/8" BSP	2
MDL-011637	3	Machined Endcap/Circular with Hole 25mm - Bore 50	1
MDL-090346	4	Rod - Hard Chrome Shaft 30 - HAC30 L=0.477	1
	5	Bush 45 x 25 L=45	1
DS2905013030	6	Cylinder-head C2 - Bore 50 - Rod 30 - 250 bar	1
ASU3038653	7	Scraper 30 x 38.6 x 5.3	1
SA30407UN	8	Rod-seal SA 30 x 40 x 7 UN	1
BU4404353	9	Backup-ring 44.04 x 3.53 x 1.02	1
OR4445353	10	O-ring 44.45 x 3.53	1
OR4890262	11	O-ring 48.90 x 2.62	1
DS2905004	12	Cylinder-piston C2 - Bore 50	1
ZA5034184DBM	13	Piston-seal 50 x 34 x 18.4/6.3	1
OR219026290P001	14	O-ring 21.90 x 2.62 - 90'-shore	1
DS2905015	15	Swage ring C25 Bore 50	1
SP06M	16	Dust plug outer thread 3/8" BSP	2
GN81180	17	Grease nipple M8x1 - 180°	2