



All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters $\text{Ⓢ} \text{ } \phi 0.1 \text{ } \text{A}$	Angles $\pm 2^\circ$ Drilled holes $+0.25 -0$ All sharp edges removed $R0.2 +0.2$ Inside and Outside deburred Surface roughness max. $Ra 3.2$	Stroke Tol. $+1.8$ -1.6
Up to	6	30	120	400	1000	2500			
Tol.	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2			

	Drawn		Pressure	250 bar
	Cust. Ref.	3845RR-1	Weight	44.32 kg
Item	CFGY0066031	Reference	0319437	
Description	C2S.110.60.310 Zwenktap~GK50DO			
Finish	Primer			



CFGCY0066031 - C2S.110.60.310 Zwenktap~GK50DO

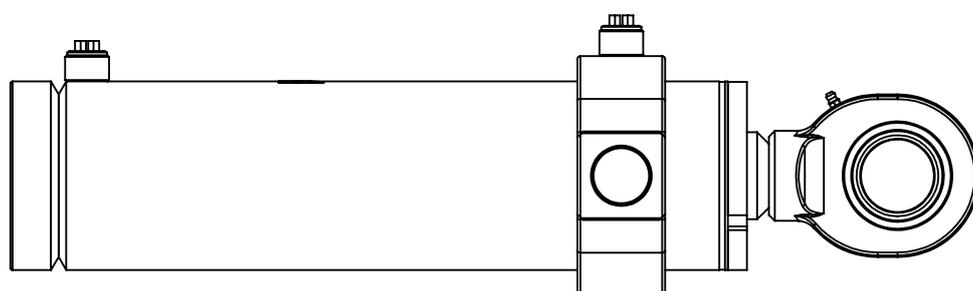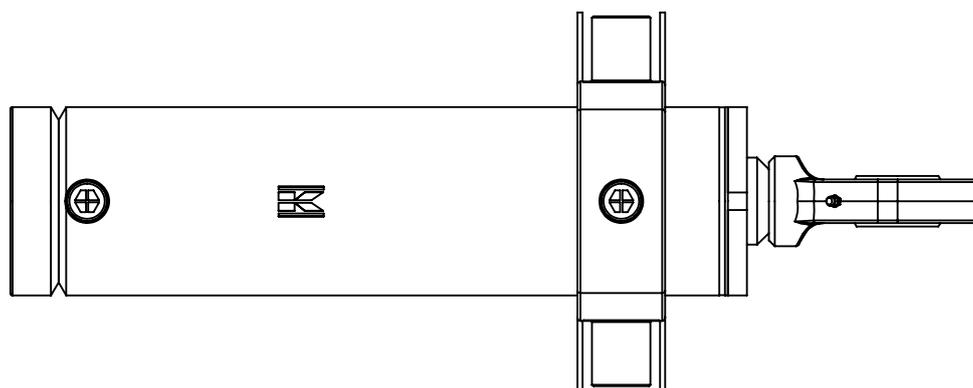

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 130 x 110 ST52-H8 CB 130-10H8 L=0.458	1
LSN08E	2	Welding-stud 1/2" BSP	2
MDL-011608	3	Trunnion	1
DS3911001A	4	Reinforced Endcap C2/C3 - Bore 110	1
MDL-090346	5	Rod - Hard Chrome Shaft 60 - HAC60 L=0.484	1
GK50DO	6	Spherical-bearing GK 50 DO	1
DS3911013060	7	Cylinder-head C2/C3 - Bore 110 - Rod 60	1
ASU6070653T38	8	Scraper 60 x 70.6 x 5.3 - T38	1
SA607010UN	9	Rod-seal 60 x 70 x 10 UN	1
GRI606597	10	Guide-ring 60 x 65 x 9.7	2
BU100534	11	Backup-ring 100 x 5.34 x 1.52	1
OR100533P001	12	O-ring 100 x 5.33	1
OR10762262P001	13	O-ring 107.62 x 2.62	1
DS2911004	14	Cylinder-piston C2 - Bore 110	1
ZA11085224DBM	15	Piston-seal 110 x 85 x 22.4/6.	1
OR408735390P001	16	O-ring 40.87 x 3.53 - 90'-shore	1
916816	17	Grub screw M8x16 45 H zinc-pl.	1
SP08M	18	Dust plug outer thread 1/2" BSP	2