


All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters $\text{Ⓞ} \ 0.1 \ A$	Angles $\pm 2^\circ$ Drilled holes $+0.25 -0$ All sharp edges removed $R0.2 +0.2$ Inside and Outside deburred Surface roughness max. $Ra \ 3.2$	Stroke Tol. $-1.6$
Up to	6	30	120	400	1000	2500			
Tol.	$\pm 0.1$	$\pm 0.2$	$\pm 0.3$	$\pm 0.5$	$\pm 0.8$	$\pm 1.2$			

	Drawn		Pressure	250 bar
	Cust. Ref.	Overschietmachine 1,50   Wielcilind	Weight	6.60 kg
Item	CFGY0023744	Reference	0313827	
Description	C2L.50.35.200 GF25DO~GK25DO			
Finish	Primer & RAL3002 Carmine-red High-Gloss			



CFGCY0023744 - C2L.50.35.200 GF25DO~GK25DO

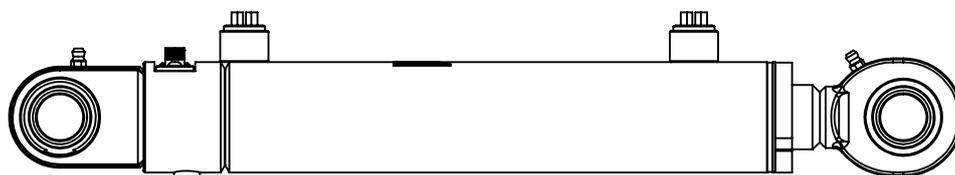

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 60 x 50 ST52-H10 CB 60-5H10 L=0.297	1
LSN06E	2	Welding-stud 3/8" BSP	2
DS2905001RO	3	Rota endcap for bore 50	1
LA2322	4	Rota Sensor Stroke 220mm, 10-30 V input, V + mA output	1
916510B	5	Grub screw M5x10 45H DIN 916	1
VSR02WD	6	End Plug (CS) R1/8 VS-R02-WD	1
GF25DO	7	Spherical-bearing GF 25 DO	1
MDL-090346	8	Rod - Hard Chrome Shaft 35 - HAC35 L=0.305	1
GK25DO	9	Spherical-bearing GK 25 DO	1
DS3905013035	10	Cylinder-head C3 - Bore 50 - Rod 35 - 320 bar	1
ASU35435T38	11	Scraper 35 x 43 x 5 - T38	1
SA354510UN	12	Rod-seal 35 x 45 x 10 UN	1
GRI354097	13	Guide-ring 35 x 40 x 9.7	1
BU4404353	14	Backup-ring 44.04 x 3.53 x 1.02	1
OR4445353	15	O-ring 44.45 x 3.53	1
OR4890262	16	O-ring 48.90 x 2.62	1
ZA5034184DBM	17	Piston-seal 50 x 34 x 18.4/6.3	1
OR219026290P001	18	O-ring 21.90 x 2.62 - 90'-shore	1
SP06M	19	Dust plug outer thread 3/8" BSP	2