


All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters $\text{Ⓢ} \text{ } \varnothing \text{ } 0,1 \text{ } \text{ } A$	Angles $\pm 2^\circ$ Drilled holes $+0,25 -0$ All sharp edges removed $R0,2 +0,2$ Inside and Outside deburred Surface roughness max. $Ra \text{ } 3,2$	Stroke Tol. $+1,8$ $-1,6$
Up to	6	30	120	400	1000	2500			
Tol.	$\pm 0,1$	$\pm 0,2$	$\pm 0,3$	$\pm 0,5$	$\pm 0,8$	$\pm 1,2$			

	Drawn		Pressure	250 bar
	Cust. Ref.		Weight	7.05 kg
Item	CFGCY0077351	Reference	0153448	
Description	C2S.50.30.300 GF25HO2RS~GK25DO			
Finish	Primer & RAL7021 Black-grey High-Gloss			



CFGCY0077351 - C2S.50.30.300 GF25HO2RS~GK25DO

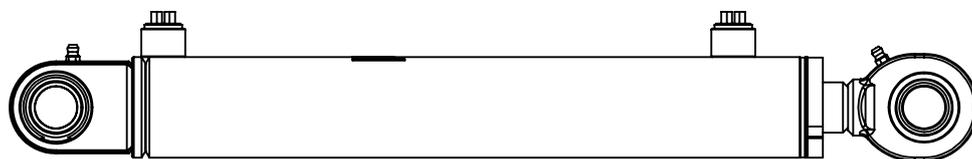

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 60 x 50 ST52-H10 CB 60-5H10 L=0.392	1
LSN06E	2	Welding-stud 3/8" BSP	2
DC3905001	3	Endcap C2/C3 - Bore 50	1
GF25HO2RS	4	Housing for GF-25	1
GE25HO2RS	5	Spherical-plain-bearing GE 25 HO 2RS	1
MDL-090346	6	Rod - Hard Chrome Shaft 30 - HAC30 L=0.414	1
GK25DO	7	Spherical-bearing GK 25 DO	1
DS2905013030	8	Cylinder-head C2 - Bore 50 - Rod 30 - 250 bar	1
ASU3038653	9	Scraper 30 x 38.6 x 5.3	1
SA30407UN	10	Rod-seal SA 30 x 40 x 7 UN	1
BU4404353	11	Backup-ring 44.04 x 3.53 x 1.02	1
OR4445353	12	O-ring 44.45 x 3.53	1
OR4890262	13	O-ring 48.90 x 2.62	1
DS2905004	14	Cylinder-piston C2 - Bore 50	1
ZA5034184DBM	15	Piston-seal 50 x 34 x 18.4/6.3	1
OR219026290P001	16	O-ring 21.90 x 2.62 - 90'-shore	1
DS2905015	17	Swage ring C25 Bore 50	1
SP06M	18	Dust plug outer thread 3/8" BSP	2