



All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters $\text{Ⓢ} \text{ } \varnothing \text{ } 0.1 \text{ } \text{A}$	Angles $\pm 2^\circ$ Drilled holes $+0.25 -0$ All sharp edges removed $R0.2 +0.2$ Inside and Outside deburred Surface roughness max. $Ra \text{ } 3.2$	Stroke
Up to	6	30	120	400	1000	2500			Tol. $+1.8$
Tol.	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2			-1.6

	Drawn		Pressure	320 bar
	Cust. Ref.	Gavin Godet de talut Gavin	Weight	16.18 kg
Item	CFGY0068694	Reference	0551693	
Description	C3S.80.40.185 Douille/55~Douille/55			
Finish	Primer			



CFGCY0068694 - C3S.80.40.185 Douille/55~Douille/55

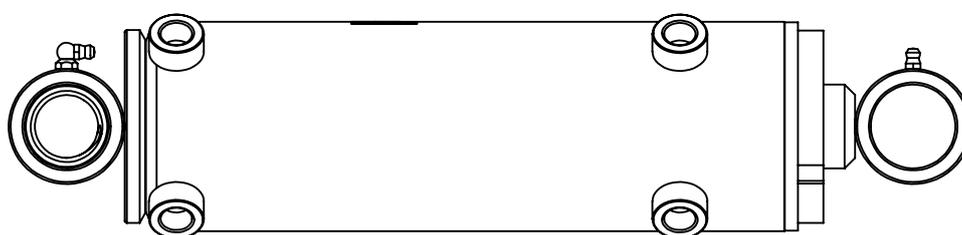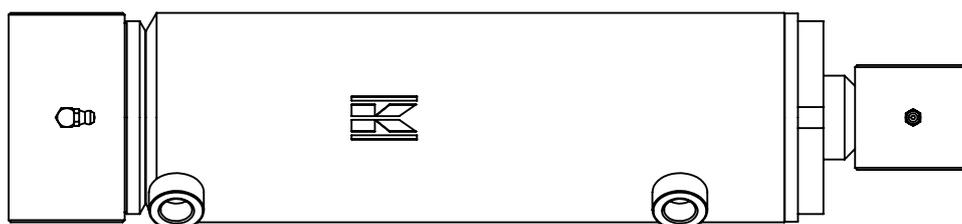

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 100 x 80 ST52-H8 CB 100-10H8 L=0.309	1
LSN0613	2	Welding-stud 3/8" BSP L=13mm	4
DC3908001	3	Endcap C2/C3 - Bore 80	1
	4	Bush 55 x 40 L=100	1
SBD304040	5	Bush hardened-steel d=30, D=40, L=40	2
MDL-090346	6	Rod - Hard Chrome Shaft 40 - HAC40 L=0.334	1
	7	Bush 55 x 40 L=50	1
DS3908013040	8	Cylinder-head C3 - Bore 80 - Rod 40 - 320 bar	1
ASU40485T38	9	Scraper 40 x 48 x 5 - T38	1
SA405010UN	10	Rod-seal 40 x 50 x 10 UN	1
SAS4055163	11	Rod-seal 40 x 55.1 x 6.3	1
GRI404597	12	Guide-ring 40 x 45 x 9.7	2
BU6922534	13	Backup-ring 69.22 x 5.34 x 1.52	1
OR6922533P001	14	O-ring 69.22 x 5.33	1
OR8060262P001	15	O-ring 80.60 x 2.62	1
DS3908004	16	Cylinder-piston C3 - Bore 80	1
ZAS8064563	17	Piston-stepseal 80 x 64.5 x 6.3	1
GRE807515	18	Wear-ring 80 x 75 x 15	2
OR346026290P001	19	O-ring 34.60 x 2.62 - 90'-shore	1
DS2909015	20	Swage ring C25 Bore 90/100	1
SP06M	21	Dust plug outer thread 3/8" BSP	4
GN6190	22	Grease nipple M6 - 90°	1
GN61180	23	Grease nipple M6 - 180°	1