
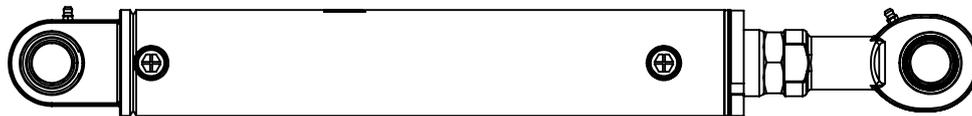


All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters $\text{Ⓢ} \text{ } \varnothing \text{ } 0,1 \text{ } \text{A}$	Angles $\pm 2^\circ$ Drilled holes $+0,25 -0$ All sharp edges removed $R0,2 +0,2$ Inside and Outside deburred Surface roughness max. $Ra \text{ } 3,2$	Stroke
Up to	6	30	120	400	1000	2500			Tol. $+1,8$
Tol.	$\pm 0,1$	$\pm 0,2$	$\pm 0,3$	$\pm 0,5$	$\pm 0,8$	$\pm 1,2$			$-1,6$

	Drawn		Pressure	250 bar
	Cust. Ref.	239710 Mittelrampe links	Weight	15.98 kg
Item	CFGCY0063631	Reference	0141772	
Description	C2S.70.50.345 GF30DO~GIR30DO2RS			
Finish	Primer			

CFGCY0063631 - C2S.70.50.345 GF30DO~GIR30DO2RS

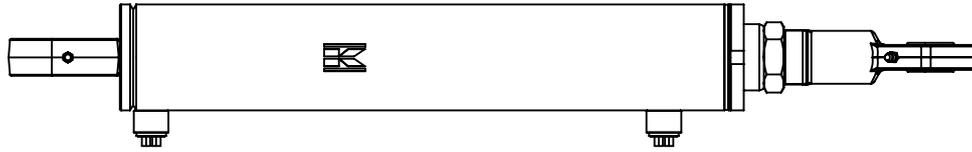

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 80 x 70 ST52-H10 CB 80-5H10 L=0.448	1
LSN06E	2	Welding-stud 3/8" BSP	2
DC3907001	3	Endcap C2/C3 - Bore 70	1
GF30DO	4	Spherical-bearing GF 30 DO	1
MDL-090346	5	Rod - Hard Chrome Shaft 50 - HAC50 L=0.540	1
GIR30DO2RS-NUT	6	Spherical-bearing GIR 30 DO-2RS	1
439B302	7	Half nut M30x2 zinc-plated 439B.302	1
DS2907013050	8	Cylinder-head C2 - Bore 70 - Rod 50 - 250 bar	1
ASU5060653	9	Scraper 50 x 60.6 x 5.3	1
SA506010UN	10	Rod-seal 50 x 60 x 10 UN	1
BU5969534	11	Backup-ring 59.69 x 5.34 x 1.52	1
OR5969533P001	12	O-ring 59.69 x 5.33	1
OR6952262	13	O-ring 69.52 x 2.62	1
DS2907004	14	Cylinder-piston C2 - Bore 70	1
ZA7050224DBM	15	Piston-seal 70 x 50 x 22.4/6.3	1
OR250726290P001	16	O-ring 25.07 x 2.62 - 90'-shore	1
DS2906015	17	Swage ring C25 Bore 60/63/70	1
SP06M	18	Dust plug outer thread 3/8" BSP	2