


All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters $\text{Ø } 0.1 \text{ A}$	Angles $\pm 2^\circ$ Drilled holes $+0.25 -0$ All sharp edges removed $R0.2 +0.2$ Inside and Outside deburred Surface roughness max. $Ra 3.2$	Stroke
Up to	6	30	120	400	1000	2500			Tol.
Tol.	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2			$+1.8$ -1.6

	Drawn		Pressure	250 bar
	Cust. Ref.		Weight	3.28 kg
Item	CFGY0069592	Reference	0326255	
Description	C2S.40.25.40 Frontflens~M16x1,5			
Finish	Primer			

CFGCY0069592 - C2S.40.25.40 Frontflens~M16x1,5

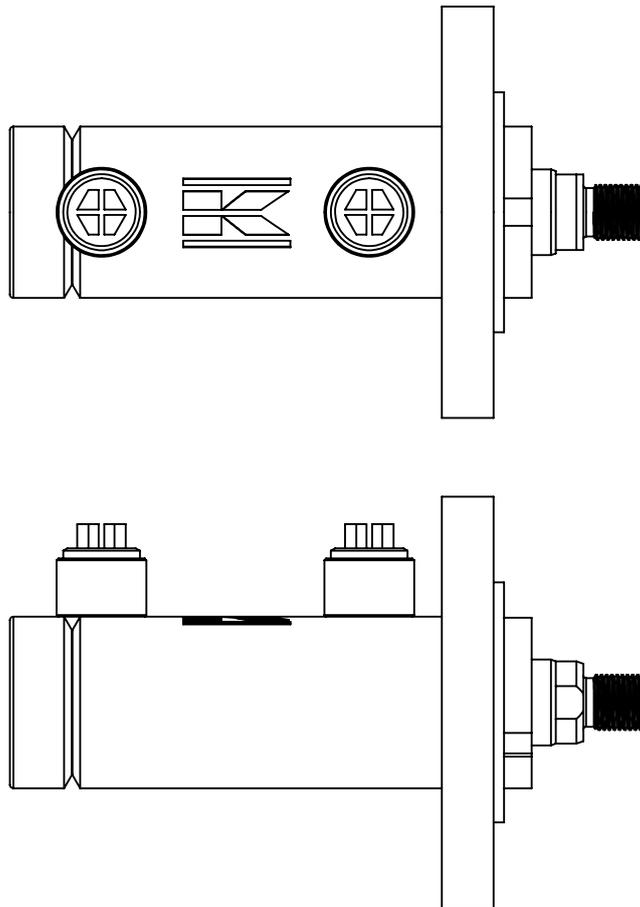

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 50 x 40 ST52-H10 CB 50-5H10 L=0.125	1
LSN06E	2	Welding-stud 3/8" BSP	2
MDL-011606	3	Front-flange	1
DS3904001A	4	Reinforced Endcap C2/C3/P2 - Bore 40	1
MDL-090346	5	Rod - Hard Chrome Shaft 25 - HAC25 L=0.164	1
DS2904013025	6	Cylinder-head C2 - Bore 40 - Rod 25 - 250 bar	1
ASU2533653	7	Scraper 25 x 33.6 x 5.3	1
SA253368UN	8	Rod-seal 25 x 33 x 6.8 UN	1
BU3452353	9	Backup-ring 34.52 x 3.53 x 1.02	1
OR3452353	10	O-ring 34.52 x 3.53	1
OR3934262	11	O-ring 39.34 x 2.62	1
DS2904004	12	Cylinder-piston C2 - Bore 40	1
ZA4024184DBM	13	Piston-seal 40 x 24 x 18.4/6.3	1
OR171326290	14	O-ring 17.13 x 2.62 - 90'-shore	1
DS2904015	15	Swage ring C25 Bore 40	1
SP06M	16	Dust plug outer thread 3/8" BSP	2