


All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters $\varnothing 0.1$ A Angles $\pm 2^\circ$ Drilled holes $+0.25 - 0$ All sharp edges removed R0.2 $+0.2$ Inside and Outside deburred Surface roughness max. Ra 3.2	Stroke
Up to	6	30	120	400	1000	2500		Tol. +1.8
Tol.	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2		-1.6

	Drawn		Pressure	320 bar
	Cust. Ref.		Weight	43.94 kg
Item	CFGCY0065788	Reference	7495040	
Description	C3S.90.60.490 Douille/90~GK50DO			
Finish	Primer			



CFGCY0065788 - C3S.90.60.490 Douille/90~GK50DO

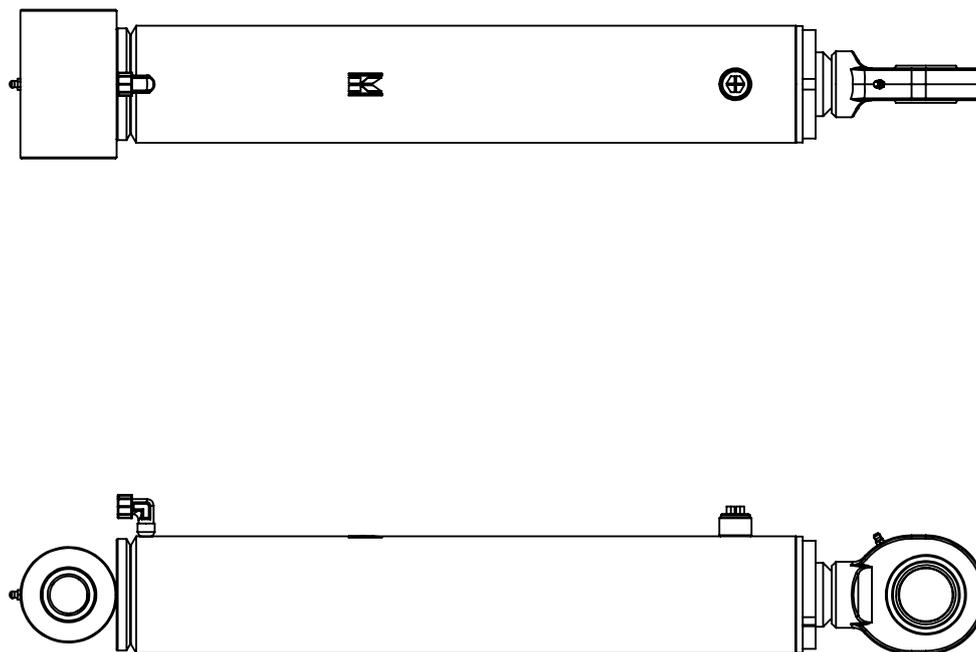

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 110 x 90 ST52-H8 CB 110-10H8 L=0.628	1
LSN08E	2	Welding-stud 1/2" BSP	1
ASV12L90	3	Weld-on coupling ASV 12L-90'	1
DC3909001	4	Endcap C2/C3 - Bore 90	1
	5	Bush 90 x 50 L=140	1
SBD355040	6	Bush hardened-steel d=35, D=50, L=40	2
MDL-090346	7	Rod - Nickle Chrome Shaft 60 - NIC60 L=0.653	1
GK50DO	8	Spherical-bearing GK 50 DO	1
DS3909013060	9	Cylinder-head C3 - Bore 90 - Rod 60 - 320 bar	1
ASU6070653T38	10	Scraper 60 x 70.6 x 5.3 - T38	1
SA607010UN	11	Rod-seal 60 x 70 x 10 UN	1
SAS6075163	12	Rod-seal 60 x 75.1 x 6.3	1
GRI606597	13	Guide-ring 60 x 65 x 9.7	2
BU7874534	14	Backup-ring 78.74 x 5.34 x 1.52	1
OR7874533P001	15	O-ring 78.74 x 5.33	1
OR8857262	16	O-ring 88.57 x 2.62	1
DS3909004	17	Cylinder-piston C3 - Bore 90	1
ZAS9074563	18	Piston-stepseal 90 x 74.5 x 6.3	1
GRE908515	19	Wear-ring 90 x 85 x 15	2
OR408735390P001	20	O-ring 40.87 x 3.53 - 90'-shore	1
916816	21	Grub screw M8x16 45 H zinc-pl.	1
SP08M	22	Dust plug outer thread 1/2" BSP	1
SKM18	23	Dust Plug Female Thread M18x1,5	1
GN81180	24		1