

All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask						
Above	-	6	30	120	400	1000
Up to	6	30	120	400	1000	2500
Tol.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2



©	∅	0.1	A
---	---	-----	---

Angles ± 2° Drilled holes +0.25 -0
 All sharp edges removed R0.2 +0.2
 Inside and Outside deburred
 Surface roughness max. Ra 3.2

Stroke	Tol. +1.8 -1.6
--------	-------------------

	Drawn		Pressure	250 bar
	Cust. Ref.	Hermes	Weight	31.56 kg
Item	CFGY0065489	Reference	0159749	
Description	P2S.70.400 GK25DO~GK25DO			
Finish	Primer & RAL5015 Sky-blue High-Gloss			

CFGCY0065489 - P2S.70.400 GK25DO~GK25DO

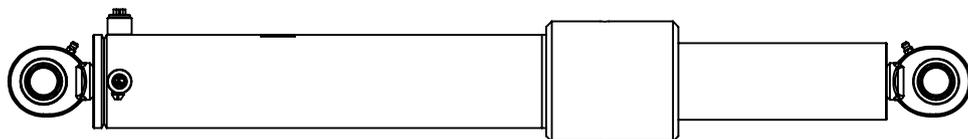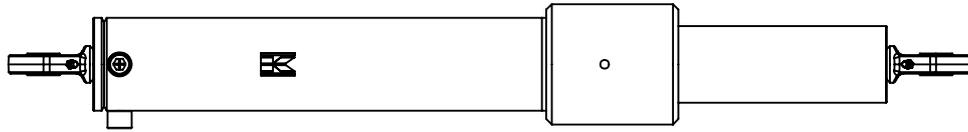

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 85 x 75 ST52-H10 CB 85-5H10 L=0.445	1
LSN04E	2	Welding-stud 1/4" BSP	2
DC3907501	3	Endcap P2 - Bore 75	1
GK25DO	4	Spherical-bearing GK 25 DO	2
MDL-090346	5	Rod - Hard Chrome Shaft 70 - HAC70 L=0.708	1
PC2907007	6	Cylinder-head P2 - Rod 70	1
ASU7080653	7	Scraper 70 x 80.6 x 5.3	1
SA7080118UN	8	Rod-seal 70 x 80 x 11.8 UN	1
OR8222262	9	O-ring 82.22 x 2.62	1
BU8222262	10	Backup-ring 82.22 x 2.62 x 1.14	1
7993RW70	11	Locking-ring RW 70 DIN 7993 for Axle	1
PC2907003	12	Guide ring PC25 rod 70/75x65x15 PC 2-907003	1
SP04M	13	Dust plug outer thread 1/4" BSP	2