
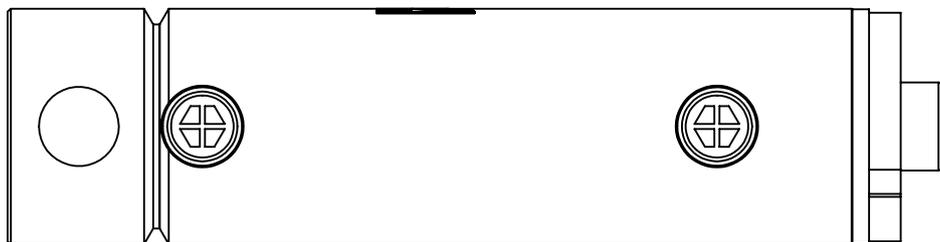


All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters $\text{Ⓢ} \text{ } \phi \text{ } 0.1 \text{ } \text{A}$	Angles $\pm 2^\circ$ Drilled holes $+0.25 -0$ All sharp edges removed $R0.2 +0.2$ Inside and Outside deburred Surface roughness max. $Ra \text{ } 3.2$	Stroke
Up to	6	30	120	400	1000	2500			Tol. $+1.8$
Tol.	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2			-1.6

	Drawn		Pressure	250 bar
	Cust. Ref.		Weight	6.83 kg
Item	CFGCY0067076	Reference	0137311	
Description	C2P.63.28.140 Boden/Bohrung~OHNE			
Finish	Primer			

CFGCY0067076 - C2P.63.28.140 Boden/Bohrung~OHNE

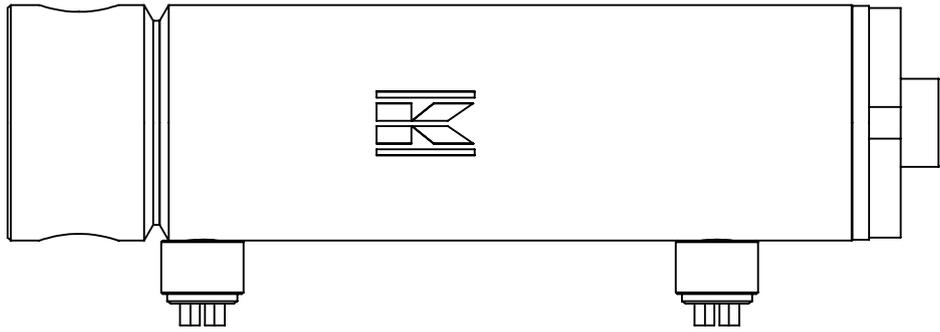

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 75 x 63 ST52-H8 CB 75-6H8 L=0.224	1
LSN06E	2	Welding-stud 3/8" BSP	2
MDL-011639	3	Machined Endcap/Circular with Hole 25.2mm - Bore 63	1
MDL-090346	4	Rod - Hard Chrome Shaft 28 - HAC28 L=0.247	1
DS2906313028	5	Cylinder-head C2/C3 - Bore 63 - Rod 28	1
ASU2836653	6	Scraper 28 x 36.6 x 5.3	1
SA283873UN	7	Rod-seal 28 x 38 x 7.3 UN	1
BU57713	8	Backup-ring 57.71 x 3 x 1.14	1
OR5675353	9	O-ring 56.75 x 3.53	1
OR6160262	10	O-ring 61.60 x 2.62	1
DS2906304S	11	Cylinder-piston C2P - Bore 63	1
ZAS635242T764	12	Piston stepseal 63 x 52 x4.2	1
OR250726290P001	13	O-ring 25.07 x 2.62 - 90'-shore	1
GRE635897	14	Wear-ring 63 x 58 x 9.7	1
91666B	15	Grub screw M6x6 45H DIN 916	1
SP06M	16	Dust plug outer thread 3/8" BSP	2