

All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask						
Above	-	6	30	120	400	1000
Up to	6	30	120	400	1000	2500
Tol.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2

© Ø 0.1 A


Angles ± 2° Drilled holes +0.25 -0  
All sharp edges removed R0.2 +0.2  
Inside and Outside deburred  
Surface roughness max. Ra 3.2

Stroke  
Tol. +1.8  
-1.6

	Drawn		Pressure	250 bar
	Cust. Ref.	BERTI	Weight	12.80 kg
Item	CFGCY0068737	Reference	7670203	
Description	C2S.80.35.225 G25.7KR~M27x2			
Finish	Primer & RAL9005 Jet-black Matt			



CFGCY0068737 - C2S.80.35.225 G25.7KR~M27x2

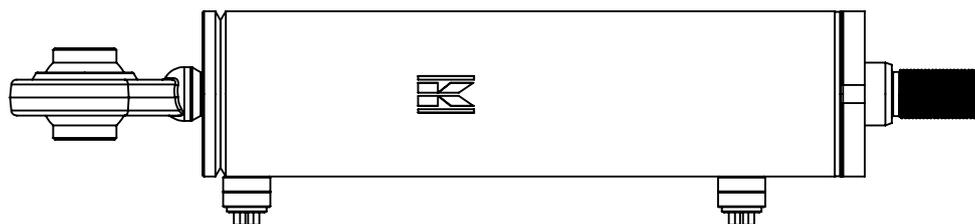

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 92 x 80 ST52-H10 CB 92-6H10 L=0.344	1
LSNM1615	2	Welding-stud M16x1.5	2
DC3908001	3	Endcap C2/C3 - Bore 80	1
KR25765D	4	G 25.7 KR L=65 ±1.5mm	1
MDL-090346	5	Rod - Hard Chrome Shaft 35 - HAC35 L=0.419	1
DS2908013035	6	Cylinder-head C2 - Bore 80 - Rod 35 - 250 bar	1
SA354510UN	7	Rod-seal 35 x 45 x 10 UN	1
BU6922534	8	Backup-ring 69.22 x 5.34 x 1.52	1
OR6922533P001	9	O-ring 69.22 x 5.33	1
OR8060262P001	10	O-ring 80.60 x 2.62	1
DS2908004	11	Cylinder-piston C2 - Bore 80	1
ZA8060224DBM	12	Piston-seal 80 x 60 x 22.4/6.3	1
OR314226290P001	13	O-ring 31.42 x 2.62 - 90'-shore	1
DS2908015	14	Swage ring C25 Bore 80	1
SPM16M	15	Dust Plug Male Thread M16x1,5	2