



All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters $\text{© } \text{Ø } 0,1 \text{ A}$	Angles $\pm 2^\circ$ Drilled holes $+0,25 -0$ All sharp edges removed $R0,2 +0,2$ Inside and Outside deburred Surface roughness max. $Ra 3,2$	Stroke
Up to	6	30	120	400	1000	2500			Tol. +1,8
Tol.	$\pm 0,1$	$\pm 0,2$	$\pm 0,3$	$\pm 0,5$	$\pm 0,8$	$\pm 1,2$			-1,6

	Drawn		Pressure	250 bar
	Cust. Ref.		Weight	7.78 kg
Item	CFGCY0073017	Reference	7680099	
Description	C2S.50.25.330 AUCUN-M20x2,5			
Finish	Primer			



CFGCY0073017 - C2S.50.25.330 AUCUN~M20x2,5

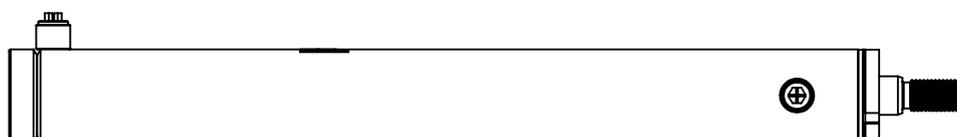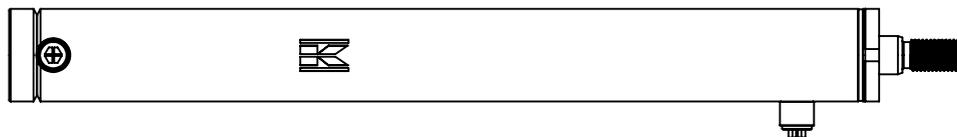

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 60 x 50 ST52-H10 CB 60-5H10 L=0.534	1
LSN04E	2	Welding-stud 1/4" BSP	2
DS3905001A	3	Reinforced Endcap C2/C3 - Bore 50	1
MDL-090346	4	Rod - Hard Chrome Shaft 25 - HAC25 L=0.596	1
DS2905013025	5	Cylinder-head C2 - Bore 50 - Rod 25 - 250 bar	1
ASU2533653	6	Scraper 25 x 33.6 x 5.3	1
SA253368UN	7	Rod-seal 25 x 33 x 6.8 UN	1
BU4404353	8	Backup-ring 44.04 x 3.53 x 1.02	1
OR4445353	9	O-ring 44.45 x 3.53	1
OR4890262	10	O-ring 48.90 x 2.62	1
DS2905004	11	Cylinder-piston C2 - Bore 50	1
ZA5034184DBM	12	Piston-seal 50 x 34 x 18.4/6.3	1
OR219026290P001	13	O-ring 21.90 x 2.62 - 90'-shore	1
DS2905015	14	Swage ring C25 Bore 50	1
MDL-014997	15	Spacer - Cylinder tube 35 x 25 ST52-H10 CB355H10 L=0.112 mtr	1
SP04M	16	Dust plug outer thread 1/4" BSP	2