

All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask						
Above	-	6	30	120	400	1000
Up to	6	30	120	400	1000	2500
Tol.	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2



All diameters	$\phi 0.1$ A
Angles $\pm 2^\circ$ Drilled holes $+0.25 -0$	
All sharp edges removed $R0.2 +0.2$	
Inside and Outside deburred	
Surface roughness max. $Ra 3.2$	

Stroke	Tol. $+1.8$ -1.6
--------	-----------------------

	Drawn		Pressure	250 bar
	Cust. Ref.	P1160-EE	Weight	2.14 kg
Item	CFGY0067995	Reference	0329460	
Description	C2S.32.20.100 GK16DO~GK16DO			
Finish	Primer			



CFGCY0067995 - C2S.32.20.100 GK16DO~GK16DO

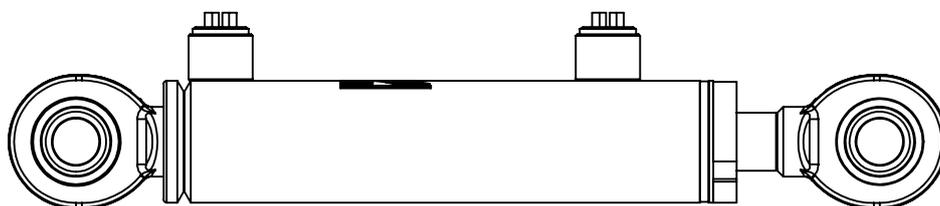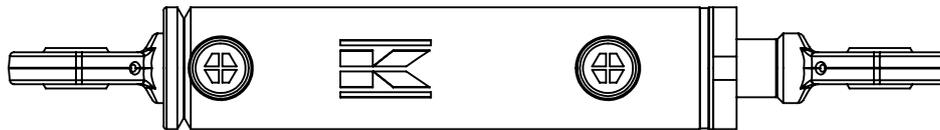

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 42 x 32 ST52-H10 CB 42-5H10 L=0.181	1
LSN04E	2	Welding-stud 1/4" BSP	2
DC3903201	3	Endcap C2/C3 - Bore 32	1
GK16DO	4	Spherical-bearing GK 16 DO	2
MDL-090346	5	Rod - Hard Chrome Shaft 20 - HAC20 L=0.202	1
DS2903213020	6	Cylinder-head C2 - Bore 32 - Rod 20 - 250 bar	1
ASU2028653	7	Scraper 20 x 28.6 x 5.3	1
SA202857UN	8	Rod-seal 20 x 28 x 5.7 UN	1
BU2824262	9	Backup-ring 28.24 x 2.62 x 1.14	1
OR2824262	10	O-ring 28.24 x 2.62	1
OR3142262	11	O-ring 31.42 x 2.62	1
DS2903204	12	Cylinder-piston C2 - Bore 32	1
ZA3224155DBM	13	Piston-seal 32 x 24 x 15.5/3.2	1
SLBMM1415	14	Seallock-nut M14x1.5 Ø32mm	1
SP04M	15	Dust plug outer thread 1/4" BSP	2