

All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask						
Above	-	6	30	120	400	1000
Up to	6	30	120	400	1000	2500
Tol.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2

© Ø 0.1 A


Angles ± 2° Drilled holes +0.25 -0  
All sharp edges removed R0.2 +0.2  
Inside and Outside deburred  
Surface roughness max. Ra 3.2

Stroke  
Tol. +1.8  
-1.6

	Drawn		Pressure	250 bar
	Cust. Ref.	Crane 600 cab. hef cilinders	Cran Weight	33.40 kg
Item	CFGY0076860	Reference	0334323	
Description	C2S.90.40.785 GF45HO2RS~GK45DO			
Finish	Primer & RAL3002 Carmine-red High-Gloss			



CFGCY0076860 - C2S.90.40.785 GF45HO2RS~GK45DO

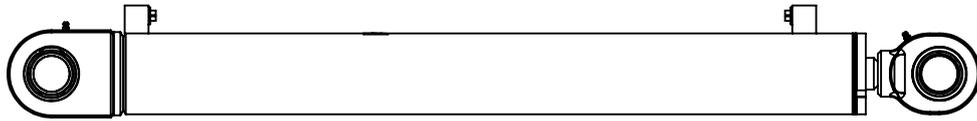

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 102 x 90 ST52-H10 CB1026H10 L=0.916	1
LSN06E90	2	Welding-stud 3/8" BSP 90'	2
DC3909001	3	Endcap C2/C3 - Bore 90	1
GF45HO2RS	4	Housing for GF-45	1
GE45HO2RS	5	Spherical-plain-bearing GE 45 HO 2RS	1
MDL-090346	6	Rod - Nickle Chrome Shaft 40 - NIC40 L=0.941	1
GK45DO	7	Spherical-bearing GK 45 DO	1
DS2909013040	8	Cylinder-head C2 - Bore 90 - Rod 40 - 250 bar	1
ASU4048653	9	Scraper 40 x 48.6 x 5.3	1
SA405010UN	10	Rod-seal 40 x 50 x 10 UN	1
BU7874534	11	Backup-ring 78.74 x 5.34 x 1.52	1
OR7874533P001	12	O-ring 78.74 x 5.33	1
OR8857262	13	O-ring 88.57 x 2.62	1
DS2909004	14	Cylinder-piston C2 - Bore 90	1
ZA9070224DBM	15	Piston-seal 90 x 70 x 22.4/6.3	1
OR346026290P001	16	O-ring 34.60 x 2.62 - 90'-shore	1
DS2909015	17	Swage ring C25 Bore 90/100	1
SP06M	18	Dust plug outer thread 3/8" BSP	2