

All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask						
Above	-	6	30	120	400	1000
Up to	6	30	120	400	1000	2500
Tol.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2

© Ø 0.1 A



All diameters
Angles ± 2° Drilled holes +0.25 -0
All sharp edges removed R0.2 +0.2
Inside and Outside deburred
Surface roughness max. Ra 3.2

Stroke
Tol. +1.8
-1.6

	Drawn		Pressure	250 bar
	Cust. Ref.		Weight	5.61 kg
Item	CFGY0064826	Reference	0334971	
Description	C2S.50.30.200 Bus/40~Bus/40			
Finish	Primer			



CFGCY0064826 - C2S.50.30.200 Bus/40~Bus/40

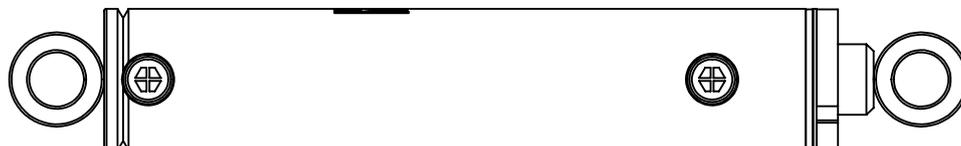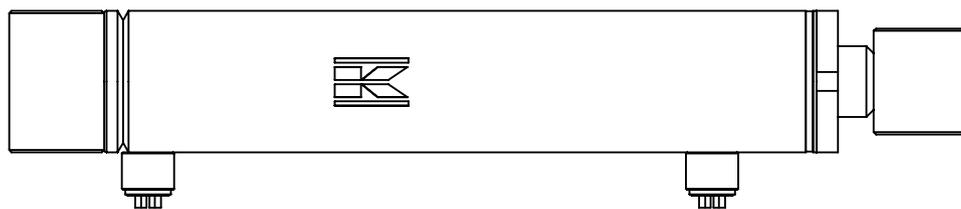

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 60 x 50 ST52-H10 CB 60-5H10 L=0.292	1
LSN04E	2	Welding-stud 1/4" BSP	2
DC3905001	3	Endcap C2/C3 - Bore 50	1
	4	Bush 40 x 23 L=60	1
MDL-090346	5	Rod - Hard Chrome Shaft 30 - HAC30 L=0.314	1
	6	Bush 40 x 23 L=45	1
DS2905013030	7	Cylinder-head C2 - Bore 50 - Rod 30 - 250 bar	1
ASU3038653	8	Scraper 30 x 38.6 x 5.3	1
SA30407UN	9	Rod-seal SA 30 x 40 x 7 UN	1
BU4404353	10	Backup-ring 44.04 x 3.53 x 1.02	1
OR4445353	11	O-ring 44.45 x 3.53	1
OR4890262	12	O-ring 48.90 x 2.62	1
DS2905004	13	Cylinder-piston C2 - Bore 50	1
ZA5034184DBM	14	Piston-seal 50 x 34 x 18.4/6.3	1
OR219026290P001	15	O-ring 21.90 x 2.62 - 90'-shore	1
DS2905015	16	Swage ring C25 Bore 50	1
SP04M	17	Dust plug outer thread 1/4" BSP	2