

All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask						
Above	-	6	30	120	400	1000
Up to	6	30	120	400	1000	2500
Tol.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2

©	∅ 0.1	A
---	-------	---


Angles ± 2° Drilled holes +0.25 -0
 All sharp edges removed R0.2 +0.2
 Inside and Outside deburred
 Surface roughness max. Ra 3.2

Stroke	Tol. +1.8 -1.6
--------	-------------------

	Drawn		Pressure	250 bar
	Cust. Ref.		Weight	56.88 kg
Item	CFGCY0069963	Reference	0106225	
Description	C2S.110.60.500 Buchse/100~Buchse/100			
Finish	Primer			



CFGCY0069963 - C2S.110.60.500 Buchse/100~Buchse/100

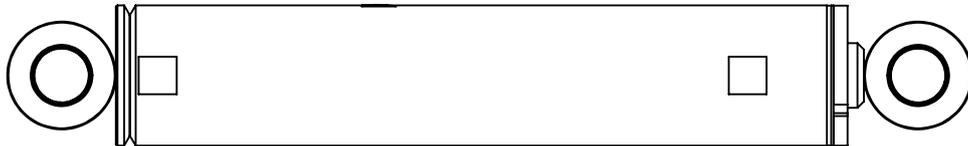

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 130 x 110 ST52-H8 CB 130-10H8 L=0.648	1
LSN08E90	2	Welding-stud 1/2" BSP 90°	2
DC3911001	3	Endcap C2/C3 - Bore 110	1
	4	Bush 100 x 55 L=130	1
ZB505560PTFE	5	Bearing-bush Permaglide P1 - d=50, D=55, L=60 (maintenance-free)	4
MDL-090346	6	Rod - Hard Chrome Shaft 60 - HAC60 L=0.674	1
	7	Bush 100 x 55 L=130	1
DS3911013060	8	Cylinder-head C2/C3 - Bore 110 - Rod 60	1
ASU6070653T38	9	Scraper 60 x 70.6 x 5.3 - T38	1
SA607010UN	10	Rod-seal 60 x 70 x 10 UN	1
GRI606597	11	Guide-ring 60 x 65 x 9.7	2
BU100534	12	Backup-ring 100 x 5.34 x 1.52	1
OR100533P001	13	O-ring 100 x 5.33	1
OR10762262P001	14	O-ring 107.62 x 2.62	1
DS2911004	15	Cylinder-piston C2 - Bore 110	1
ZA11085224DBM	16	Piston-seal 110 x 85 x 22.4/6.	1
OR408735390P001	17	O-ring 40.87 x 3.53 - 90'-shore	1
916816	18	Grub screw M8x16 45 H zinc-pl.	1
SP08M	19	Dust plug outer thread 1/2" BSP	2