
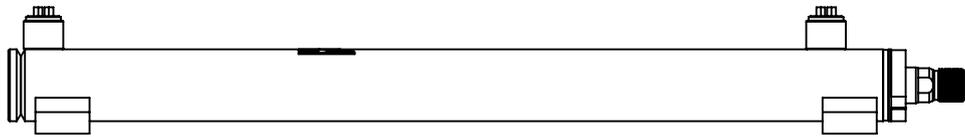


All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters	Angles ± 2° Drilled holes +0.25 -0	Stroke
Up to	6	30	120	400	1000	2500	⊙ ∅ 0.1 A	All sharp edges removed R0.2 +0.2	Tol. +1.8
Tol.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2		Inside and Outside deburred	-1.6
								Surface roughness max. Ra 3.2	

	Drawn		Pressure	250 bar
	Cust. Ref.	Chroom poollift	Weight	4.24 kg
Item	CFGCY0068058	Reference	0324437	
Description	C2S.30.20.400 Voeten-M18x1.5			
Finish	Primer & RAL7021 Black-grey High-Gloss			

CFGCY0068058 - C2S.30.20.400 Voeten~M18x1.5

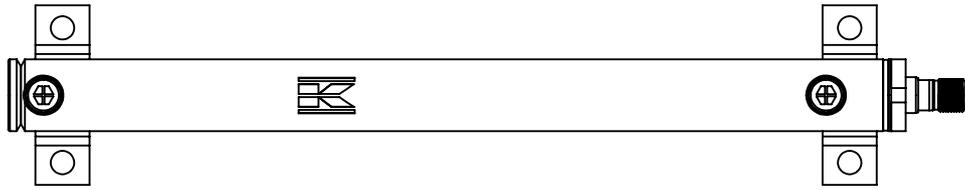

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 40 x 30 ST52-H10 CB 40-5H10 L=0.481	1
LSN04E	2	Welding-stud 1/4" BSP	2
MDL-011607	3	Side-lug	2
DC3903001	4	Endcap C2/C3/P2 - Bore 30	1
MDL-090346	5	Rod - Hard Chrome Shaft 20 - HAC20 L=0.521	1
DS2903013020	6	Cylinder-head C2 - Bore 30 - Rod 20 - 250 bar	1
ASU2028653	7	Scraper 20 x 28.6 x 5.3	1
SA202857UN	8	Rod-seal 20 x 28 x 5.7 UN	1
BU2507262	9	Backup-ring 25.86 x 2.18 x 1.14	1
OR250726290P001	10	O-ring 25.07 x 2.62 - 90'-shore	1
OR2982262	11	O-ring 29.82 x 2.62	1
DS2903004	12	Cylinder-piston C2 - Bore 30	1
ZA3021135DBM	13	Piston-seal 30 x 21 x 13.5/2.1	1
MDL-020787	14		1
SLBMM1215	15	Seallock-nut M12x1.5 Ø30mm	1
SP04M	16	Dust plug outer thread 1/4" BSP	2