

All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask						
Above	-	6	30	120	400	1000
Up to	6	30	120	400	1000	2500
Tol.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2

©	Ø 0.1	A
---	-------	---



Angles ± 2°  
 Drilled holes +0.25 -0  
 All sharp edges removed R0.2 +0.2  
 Inside and Outside deburred  
 Surface roughness max. Ra 3.2

Stroke  
 Tol. +1.8  
 -1.6

	Drawn		Pressure	250 bar
	Cust. Ref.	01758	Weight	11.84 kg
Item	CFGY0079603	Reference	0420148	
Description	C2P.80.35.80 Zwenktap-M5			
Finish	Primer			



**CFGCY0079603 - C2P.80.35.80 Zwenktap~M5**

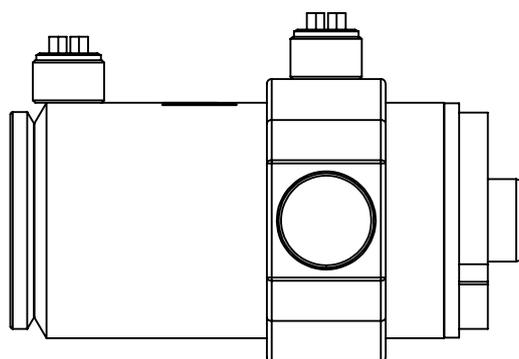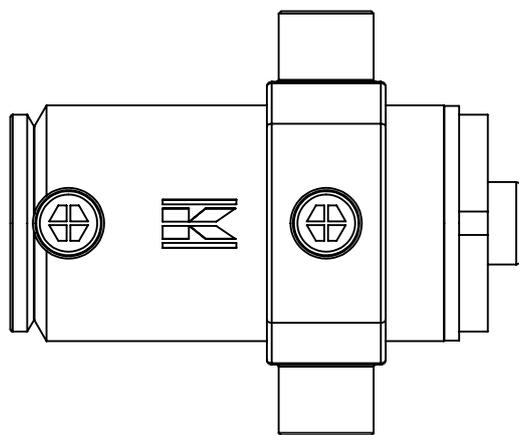

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 100 x 80 ST52-H8 CB 100-10H8 L=0.179	1
LSN08E	2	Welding-stud 1/2" BSP	2
MDL-011608	3	Trunnion	1
DC3908001	4	Endcap C2/C3 - Bore 80	1
MDL-090346	5	Rod - Hard Chrome Shaft 35 - HAC35 L=0.204	1
DS2908013035	6	Cylinder-head C2 - Bore 80 - Rod 35 - 250 bar	1
SA354510UN	7	Rod-seal 35 x 45 x 10 UN	1
BU6922534	8	Backup-ring 69.22 x 5.34 x 1.52	1
OR6922533P001	9	O-ring 69.22 x 5.33	1
OR8060262P001	10	O-ring 80.60 x 2.62	1
DS2908004S	11	Cylinder-piston C2P - Bore 80	1
ZAS8064563T764	12	Pistom stepseal 80 x 64.5 x 6.3	1
OR314226290P001	13	O-ring 31.42 x 2.62 - 90'-shore	1
GRE807515	14	Wear-ring 80 x 75 x 15	1
91666B	15	Grub screw M6x6 45H DIN 916	1
SP08M	16	Dust plug outer thread 1/2" BSP	2