



All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters $\text{⌀} 0.1 \text{ A}$	Angles $\pm 2^\circ$ Drilled holes $+0.25 -0$ All sharp edges removed $R0.2 +0.2$ Inside and Outside deburred Surface roughness max. $Ra 3.2$	Stroke Tol. $+1.8$ $-1.6$
Up to	6	30	120	400	1000	2500			
Tol.	$\pm 0.1$	$\pm 0.2$	$\pm 0.3$	$\pm 0.5$	$\pm 0.8$	$\pm 1.2$			

	Drawn		Pressure	320 bar
	Cust. Ref.	8011-2-10-0088	Weight	15.42 kg
Item	CFGY0079354	Reference	0143525	
Description	C3S.70.40.220 Schwenzapfen~GK35DO			
Finish	Primer			



# CFGCY0079354 - C3S.70.40.220 Schwenkzapfen~GK35DO

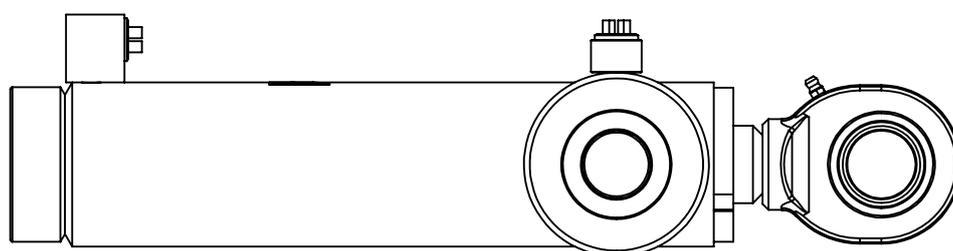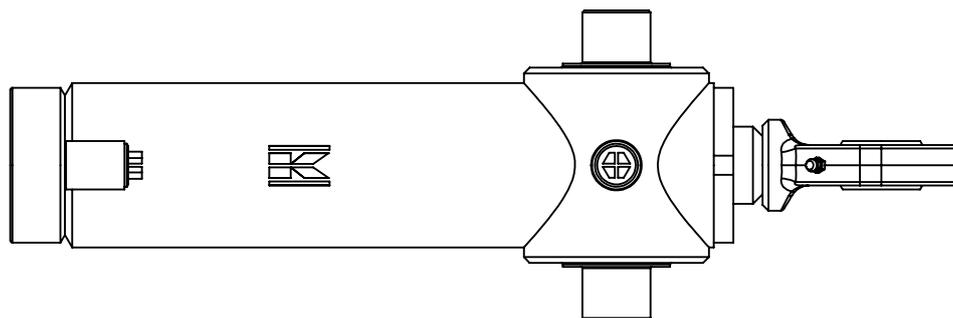

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 85 x 70 ST52-H8 CB 85-7.5H8 L=0.333	1
LSN06E	2	Welding-stud 3/8" BSP	1
MDL-011608	3	Trunnion	1
LSN06E90	4	Welding-stud 3/8" BSP 90'	1
DS3907001A	5	Reinforced Endcap C2/C3 - Bore 70	1
MDL-090346	6	Rod - Hard Chrome Shaft 40 - HAC40 L=0.356	1
GK35DO	7	Spherical-bearing GK 35 DO	1
DS3907013040	8	Cylinder-head C3 - Bore 70 - Rod 40 - 320 bar	1
ASU40485T38	9	Scraper 40 x 48 x 5 - T38	1
SA405010UN	10	Rod-seal 40 x 50 x 10 UN	1
SAS4055163	11	Rod-seal 40 x 55.1 x 6.3	1
GRI404597	12	Guide-ring 40 x 45 x 9.7	1
BU5969534	13	Backup-ring 59.69 x 5.34 x 1.52	1
DS3907004	14	Cylinder-piston C3 - Bore 70	1
ZAS705942	15	Piston-stepseal 70 x 59 x 4.2	1
GRE706597	16	Wear-ring 70 x 65 x 9.7	2
OR314226290P001	17	O-ring 31.42 x 2.62 - 90'-shore	1
DS2908015	18	Swage ring C25 Bore 80	1
SP06M	19	Dust plug outer thread 3/8" BSP	2