
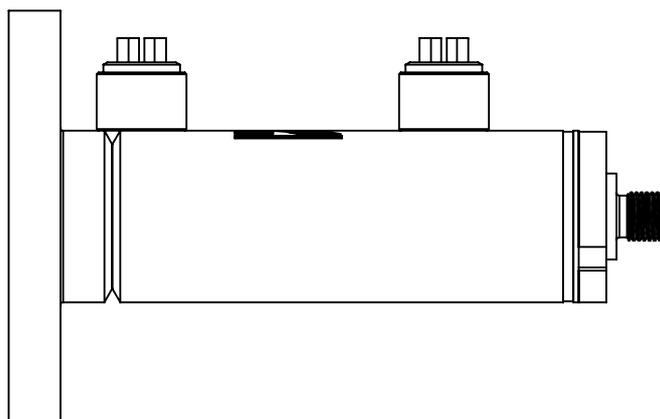


All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters	Angles ± 2° Drilled holes +0.25 -0 All sharp edges removed R0.2 +0.2 Inside and Outside deburred Surface roughness max. Ra 3.2	Stroke
Up to	6	30	120	400	1000	2500	⊙ ∅ 0.1 A		Tol. +1.8 -1.6
Tol.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2			

	Drawn		Pressure	250 bar
	Cust. Ref.		Weight	3.37 kg
Item	CFGY0059629	Reference	2002207	
Description	C2S.40.25.50 Górapokrywa~M14x1,5			
Finish	Primer & RAL9005 Jet-black Matt			

CFGCY0059629 - C2S.40.25.50 Górapokrywa~M14x1,5

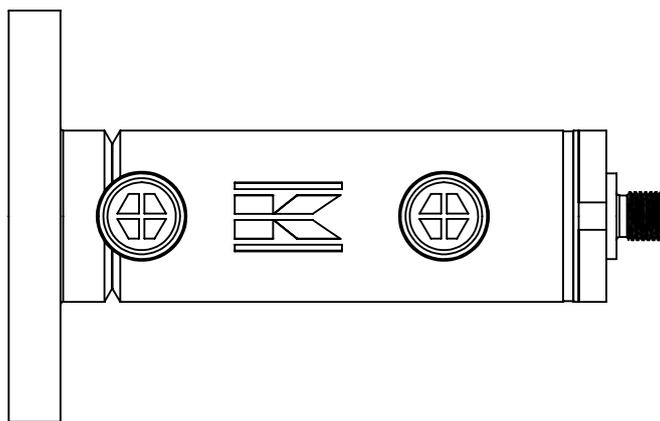

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 50 x 40 ST52-H10 CB 50-5H10 L=0.135	1
LSN06E	2	Welding-stud 3/8" BSP	2
MDL-010695	3	CapFlange Bore 40	1
MDL-090346	4	Rod - Hard Chrome Shaft 25 - HAC25 L=0.158	1
DS2904013025	5	Cylinder-head C2 - Bore 40 - Rod 25 - 250 bar	1
ASU2533653	6	Scraper 25 x 33.6 x 5.3	1
SA253368UN	7	Rod-seal 25 x 33 x 6.8 UN	1
BU3452353	8	Backup-ring 34.52 x 3.53 x 1.02	1
OR3452353	9	O-ring 34.52 x 3.53	1
OR3934262	10	O-ring 39.34 x 2.62	1
DS2904004	11	Cylinder-piston C2 - Bore 40	1
ZA4024184DBM	12	Piston-seal 40 x 24 x 18.4/6.3	1
OR171326290	13	O-ring 17.13 x 2.62 - 90'-shore	1
DS2904015	14	Swage ring C25 Bore 40	1
SP06M	15	Dust plug outer thread 3/8" BSP	2