


All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters $\text{Ⓢ} \text{ } \phi \text{ } 0.1 \text{ } \text{ } A$	Angles $\pm 2^\circ$ Drilled holes $+0.25 -0$ All sharp edges removed $R0.2 +0.2$ Inside and Outside deburred Surface roughness max. $Ra \text{ } 3.2$	Stroke Tol. $+1.8$ -1.6
Up to	6	30	120	400	1000	2500			
Tol.	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2			

	Drawn		Pressure	250 bar
	Cust. Ref.	Hiemstra	Weight	15.78 kg
Item	CFGCY0079610	Reference	0354229	
Description	C2S.70.35.435 Bus/65~Bus/65			
Finish	Primer & RAL1007 Daffodil-yellow High-Gloss			



CFGCY0079610 - C2S.70.35.435 Bus/65~Bus/65

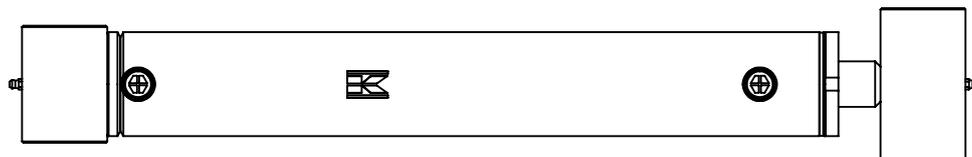

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 80 x 70 ST52-H10 CB 80-5H10 L=0.538	1
LSN06E	2	Welding-stud 3/8" BSP	2
DC3907001	3	Endcap C2/C3 - Bore 70	1
	4	Bush 65 x 35 L=90	1
MDL-090346	5	Rod - Hard Chrome Shaft 35 - HAC35 L=0.578	1
	6	Bush 65 x 35 L=117	1
DS2907013035	7	Cylinder-head C2 - Bore 70 - Rod 35 - 250 bar	1
SA354510UN	8	Rod-seal 35 x 45 x 10 UN	1
BU5969534	9	Backup-ring 59.69 x 5.34 x 1.52	1
DS2907004	10	Cylinder-piston C2 - Bore 70	1
DS2906015	11	Swage ring C25 Bore 60/63/70	1
SP06M	12	Dust plug outer thread 3/8" BSP	2
GN61180	13	Grease nipple M6 - 180°	2