


All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask						
Above	-	6	30	120	400	1000
Up to	6	30	120	400	1000	2500
Tol.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2

All diameters	Angles ± 2°	Drilled holes +0.25 -0	All sharp edges removed R0.2 +0.2	Inside and Outside deburred	Surface roughness max. Ra 3.2	Stroke
© ∅ 0.1 A						Tol. +1.8 -1.6

	Drawn		Pressure	250 bar
	Cust. Ref.	baeten baeten	Weight	7.64 kg
Item	CFGY0078647	Reference	0418053	
Description	C2S.50.35.300 Gaffel/65x50x25~M24x3			
Finish	Primer			



CFGCY0078647 - C2S.50.35.300 Gaffel/65x50x25~M24x3

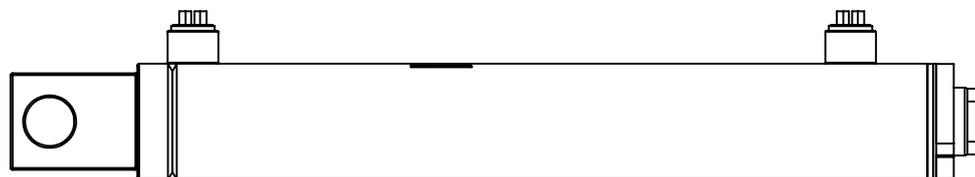

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 60 x 50 ST52-H10 CB 60-5H10 L=0.392	1
LSN06E	2	Welding-stud 3/8" BSP	2
DS3905001A	3	Reinforced Endcap C2/C3 - Bore 50	1
FS1714	4	Clevis 65x50x25 hole 25	1
MDL-090346	5	Rod - Nickle Chrome Shaft 35 - NIC35 L=0.414	1
DS3905013035	6	Cylinder-head C3 - Bore 50 - Rod 35 - 320 bar	1
ASU35435T38	7	Scraper 35 x 43 x 5 - T38	1
SA354510UN	8	Rod-seal 35 x 45 x 10 UN	1
GRI354097	9	Guide-ring 35 x 40 x 9.7	1
BU4404353	10	Backup-ring 44.04 x 3.53 x 1.02	1
OR4445353	11	O-ring 44.45 x 3.53	1
OR4890262	12	O-ring 48.90 x 2.62	1
DS2905004	13	Cylinder-piston C2 - Bore 50	1
ZA5034184DBM	14	Piston-seal 50 x 34 x 18.4/6.3	1
OR219026290P001	15	O-ring 21.90 x 2.62 - 90'-shore	1
DS2905015	16	Swage ring C25 Bore 50	1
SP06M	17	Dust plug outer thread 3/8" BSP	2