


All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask						
Above	-	6	30	120	400	1000
Up to	6	30	120	400	1000	2500
Tol.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2

All diameters	Angles ± 2° Drilled holes +0.25 -0	Stroke
⊙ Ø 0.1   A	All sharp edges removed R0.2 +0.2	Tol. +1.8
	Inside and Outside deburred	-1.6
	Surface roughness max. Ra 3.2	

	Drawn		Pressure	250 bar
	Cust. Ref.		Weight	25.93 kg
Item	CFGCY0060176	Reference	2002207	
Description	C2S.90.60.315 GF40DO~GK40DO			
Finish	Primer			



CFGCY0060176 - C2S.90.60.315 GF40DO~GK40DO

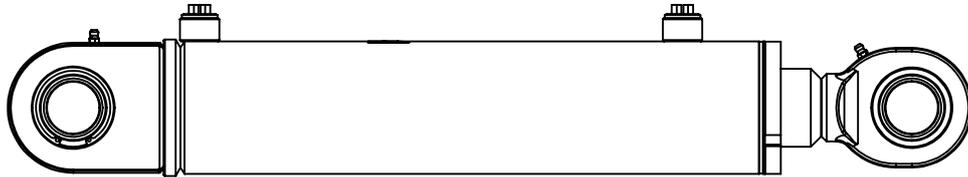

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 102 x 90 ST52-H10 CB1026H10 L=0.446	1
LSN08E	2	Welding-stud 1/2" BSP	2
DC3909001	3	Endcap C2/C3 - Bore 90	1
GF40DO	4	Spherical-bearing GF 40 DO	1
MDL-090346	5	Rod - Hard Chrome Shaft 60 - HAC60 L=0.487	1
GK40DO	6	Spherical-bearing GK 40 DO	1
DS2909013060	7	Cylinder-head C2 - Bore 90 - Rod 60 - 250 Bar	1
ASU6070653	8	Scraper 60 x 70.6 x 5.3	1
SA607010UN	9	Rod-seal 60 x 70 x 10 UN	1
BU7874534	10	Backup-ring 78.74 x 5.34 x 1.52	1
OR7874533P001	11	O-ring 78.74 x 5.33	1
OR8857262	12	O-ring 88.57 x 2.62	1
DS2909004	13	Cylinder-piston C2 - Bore 90	1
ZA9070224DBM	14	Piston-seal 90 x 70 x 22.4/6.3	1
OR346026290P001	15	O-ring 34.60 x 2.62 - 90'-shore	1
DS2909015	16	Swage ring C25 Bore 90/100	1
SP08M	17	Dust plug outer thread 1/2" BSP	2