

All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask						
Above	-	6	30	120	400	1000
Up to	6	30	120	400	1000	2500
Tol.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2

©	Ø 0.1	A
---	-------	---



Angles ± 2° Drilled holes +0.25 -0  
All sharp edges removed R0.2 +0.2  
Inside and Outside deburred  
Surface roughness max. Ra 3.2

Stroke	Tol. +1.8 -1.6
--------	-------------------

	Drawn		Pressure	250 bar
	Cust. Ref.		Weight	1.75 kg
Item	CFGY0079637	Reference	0157588	
Description	C2S.30.16.90 GK15DO~GK15DO			
Finish	Primer			



CFGCY0079637 - C2S.30.16.90 GK15DO~GK15DO

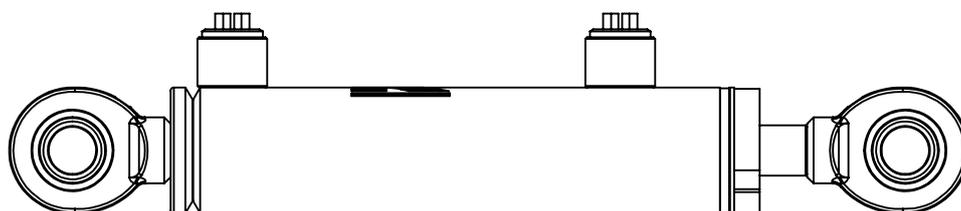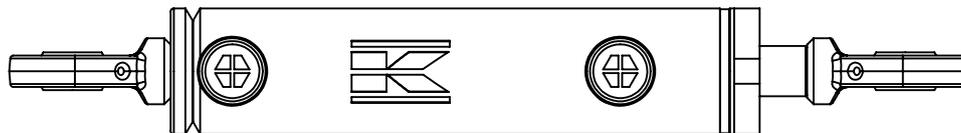

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 40 x 30 ST52-H10 CB 40-5H10 L=0.171	1
LSN04E	2	Welding-stud 1/4" BSP	2
DC3903001	3	Endcap C2/C3/P2 - Bore 30	1
GK15DO	4	Spherical-bearing GK 15 DO	2
MDL-090346	5	Rod - Hard Chrome Shaft 16 - HAC16 L=0.193	1
DS2903013016	6	Cylinder-head C2/C3 - Bore 30 Rod 16	1
ASU1624653	7	Scraper 16 x 24.6 x 5.3	1
SA16225UN	8	Rod-seal 16 x 22 x 5 UN	1
BU2507262	9	Backup-ring 25.86 x 2.18 x 1.14	1
OR250726290P001	10	O-ring 25.07 x 2.62 - 90'-shore	1
OR2982262	11	O-ring 29.82 x 2.62	1
DS2903004	12	Cylinder-piston C2 - Bore 30	1
ZA3021135DBM	13	Piston-seal 30 x 21 x 13.5/2.1	1
MDL-020787	14		1
SLBMM1215	15	Seallock-nut M12x1.5 Ø30mm	1
SP04M	16	Dust plug outer thread 1/4" BSP	2