



All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters $\text{© } \varnothing 0.1 \text{ A}$	Angles $\pm 2^\circ$ Drilled holes $+0.25 -0$ All sharp edges removed $R0.2 +0.2$ Inside and Outside deburred Surface roughness max. $Ra 3.2$	Stroke
Up to	6	30	120	400	1000	2500			Tol. +1.8
Tol.	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2			-1.6

	Drawn		Pressure	250 bar
	Cust. Ref.	AMQ-H-0100-0 FFA 531	Weight	4.42 kg
Item	CFGCY0079644	Reference	0141462	
Description	C2P.50.25.190 OHNE~GK20DO			
Finish	Primer			



CFGCY0079644 - C2P.50.25.190 OHNE~GK20DO

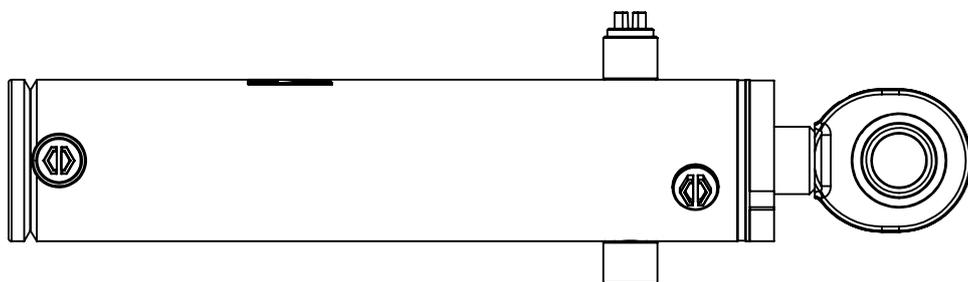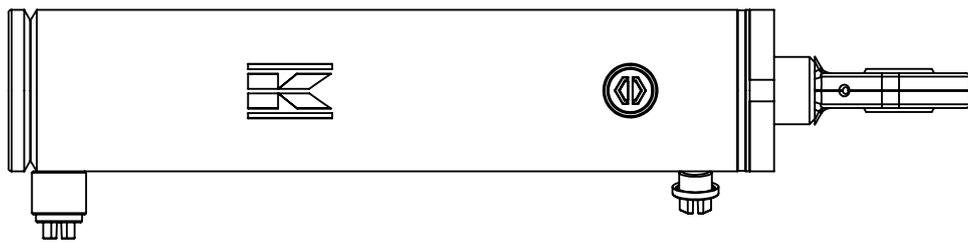

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 60 x 50 ST52-H8 CB 60-5H8 L=0.265	1
LSNM1215	2	Welding-stud M12x1.5	3
DC3905001	3	Endcap C2/C3 - Bore 50	1
MDL-090346	4	Rod - Hard Chrome Shaft 25 - HAC25 L=0.287	1
GK20DO	5	Spherical-bearing GK 20 DO	1
DS2905013025	6	Cylinder-head C2 - Bore 50 - Rod 25 - 250 bar	1
ASU2533653	7	Scraper 25 x 33.6 x 5.3	1
SA253368UN	8	Rod-seal 25 x 33 x 6.8 UN	1
BU4404353	9	Backup-ring 44.04 x 3.53 x 1.02	1
OR4445353	10	O-ring 44.45 x 3.53	1
OR4890262	11	O-ring 48.90 x 2.62	1
DS2905004S	12	Cylinder-piston C2P - Bore 50	1
ZAS503942T764	13	Piston stepseal 50 x 39 x 4.2	1
OR219026290P001	14	O-ring 21.90 x 2.62 - 90'-shore	1
GRE504597	15	Wear-ring 50 x 45 x 9.7	1
91655B	16	Grub screw M5x5 45H DIN 916	1
SPM12M	17	Dust Plug Male Thread M12x1,5	3