

All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask						
Above	-	6	30	120	400	1000
Up to	6	30	120	400	1000	2500
Tol.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2

©	Ø 0.1	A
---	-------	---


Angles ± 2° Drilled holes +0.25 -0
 All sharp edges removed R0.2 +0.2
 Inside and Outside deburred
 Surface roughness max. Ra 3.2

Stroke
 Tol. +1.8
 -1.6

	Drawn		Pressure	250 bar
	Cust. Ref.		Weight	7.07 kg
Item	CFGY0079633	Reference	7441650	
Description	C2S.50.25.280 GK25DO~GK25DO			
Finish	Primer			



CFGCY0079633 - C2S.50.25.280 GK25DO~GK25DO

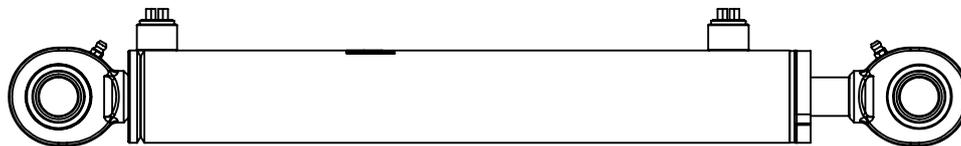

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 60 x 50 ST52-H10 CB 60-5H10 L=0.423	1
LSN06E	2	Welding-stud 3/8" BSP	2
DC3905001	3	Endcap C2/C3 - Bore 50	1
GK25DO	4	Spherical-bearing GK 25 DO	2
MDL-090346	5	Rod - Hard Chrome Shaft 25 - HAC25 L=0.455	1
DS2905013025	6	Cylinder-head C2 - Bore 50 - Rod 25 - 250 bar	1
ASU2533653	7	Scraper 25 x 33.6 x 5.3	1
SA253368UN	8	Rod-seal 25 x 33 x 6.8 UN	1
BU4404353	9	Backup-ring 44.04 x 3.53 x 1.02	1
OR4445353	10	O-ring 44.45 x 3.53	1
OR4890262	11	O-ring 48.90 x 2.62	1
DS2905004	12	Cylinder-piston C2 - Bore 50	1
ZA5034184DBM	13	Piston-seal 50 x 34 x 18.4/6.3	1
OR219026290P001	14	O-ring 21.90 x 2.62 - 90'-shore	1
DS2905015	15	Swage ring C25 Bore 50	1
MDL-014997	16	Spacer - Cylinder tube 35 x 25 ST52-H10 CB355H10 L=0.051 mtr	1
SP06M	17	Dust plug outer thread 3/8" BSP	2