


All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters $\text{Ø } 0.1 \text{ A}$	Angles $\pm 2^\circ$ Drilled holes $+0.25 -0$ All sharp edges removed R0.2 $+0.2$ Inside and Outside deburred Surface roughness max. Ra 3.2	Stroke
Up to	6	30	120	400	1000	2500			Tol. +1.8
Tol.	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2			-1.6

	Drawn		Pressure	250 bar
	Cust. Ref.	Zwenkzylinder HD2944 24.3.1098.00	Weight	33.35 kg
Item	CFGY0079548	Reference	0323258	
Description	C2S.100.60.250 GK50DO~GK50DO			
Finish	Primer & RAL7016 Anthracite-grey High-Gloss			



CFGCY0079548 - C2S.100.60.250 GK50DO~GK50DO

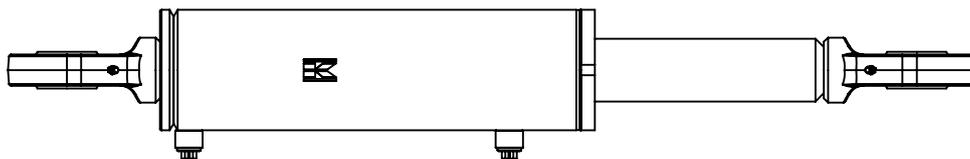

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 115 x 100 ST52-H10 CB11575H10 L=0.386	1
LSN06E	2	Welding-stud 3/8" BSP	2
DC3910001	3	Endcap C2/C3 - Bore 100	1
GK50DO	4	Spherical-bearing GK 50 DO	2
MDL-090346	5	Rod - Hard Chrome Shaft 60 - HAC60 L=0.614	1
DS2910013060	6	Cylinder-head C2 - Bore 100 - Rod 60 - 250 bar	1
ASU6070653	7	Scraper 60 x 70.6 x 5.3	1
SA607010UN	8	Rod-seal 60 x 70 x 10 UN	1
BU8969534	9	Backup-ring 89.69 x 5.34 x 1.52	1
OR8969533P001	10	O-ring 89.69 x 5.33	1
OR9493262	11	O-ring 94.93 x 2.62	1
DS2910004	12	Cylinder-piston C2 - Bore 100	1
ZA10075224DBM	13	Piston-seal 100 x 75 x 22.4/6.	1
OR346026290P001	14	O-ring 34.60 x 2.62 - 90'-shore	1
DS2909015	15	Swage ring C25 Bore 90/100	1
SP06M	16	Dust plug outer thread 3/8" BSP	2