

All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask						
Above	-	6	30	120	400	1000
Up to	6	30	120	400	1000	2500
Tol.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2

©	∅ 0.1	A
---	-------	---


Angles ± 2° Drilled holes +0.25 -0
 All sharp edges removed R0.2 +0.2
 Inside and Outside deburred
 Surface roughness max. Ra 3.2

Stroke
 Tol. +1.8
 -1.6

	Drawn		Pressure	250 bar
	Cust. Ref.	BAS ELEVATEUR PANTERA BAS ELEVATEUR	Weight	9.00 kg
Item	CFGCY0079630	Reference	7404110	
Description	C2S.60.30.300 Fond/Circulaire-Douille/50			
Finish	Primer			



CFGCY0079630 - C2S.60.30.300 Fond/Circulaire~Douille/50

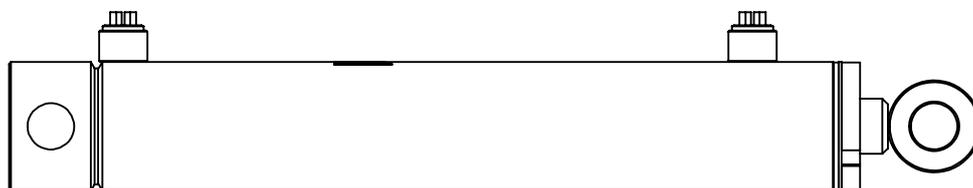

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 70 x 60 ST52-H10 CB 70-5H10 L=0.401	1
LSN06E	2	Welding-stud 3/8" BSP	2
MDL-011638	3	Machined Endcap/Circular with Hole 25.2mm - Bore 60	1
MDL-090346	4	Rod - Hard Chrome Shaft 30 - HAC30 L=0.424	1
	5	Bush 50 x 25 L=45	1
DS2906013030	6	Cylinder-head C2 - Bore 60 - Rod 30 - 250 bar	1
ASU3038653	7	Scraper 30 x 38.6 x 5.3	1
SA30407UN	8	Rod-seal SA 30 x 40 x 7 UN	1
BU5357353	9	Backup-ring 53.57 x 3.53 x 1.02	1
OR5357353	10	O-ring 53.57 x 3.53	1
OR5842262	11	O-ring 58.42 x 2.62	1
DS2906004	12	Cylinder-piston C2 - Bore 60	1
ZA6044184DBM	13	Piston-seal 60 x 44 x 18.4/6.3	1
OR250726290P001	14	O-ring 25.07 x 2.62 - 90'-shore	1
DS2906015	15	Swage ring C25 Bore 60/63/70	1
SP06M	16	Dust plug outer thread 3/8" BSP	2