

All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask						
Above	-	6	30	120	400	1000
Up to	6	30	120	400	1000	2500
Tol.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2

©	\varnothing 0.1	A
---	-------------------	---



Angles ± 2°
 Drilled holes +0.25 -0
 All sharp edges removed R0.2 +0.2
 Inside and Outside deburred
 Surface roughness max. Ra 3.2

Stroke
 Tol. +1.8
 -1.6

	Drawn		Pressure	320 bar
	Cust. Ref.		Weight	37.36 kg
Item	CFGCY0078814	Reference	2201585	
Description	C3S.80.55.630 GF35HO2RS~GIHRK35HO2RS			
Finish	Primer			



CFGCY0078814 - C3S.80.55.630 GF35HO2RS~GIHRK35HO2RS

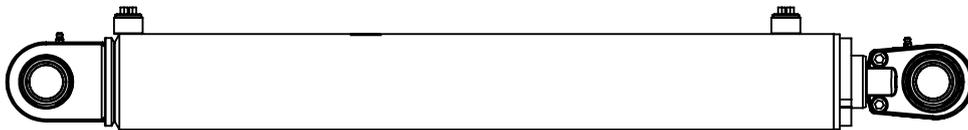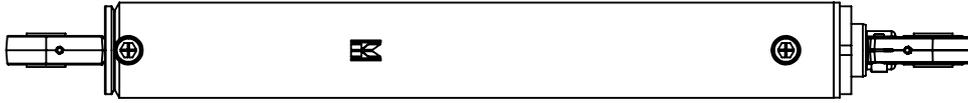

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 100 x 80 ST52-H8 CB 100-10H8 L=0.754	1
LSN08E	2	Welding-stud 1/2" BSP	2
DC3908001	3	Endcap C2/C3 - Bore 80	1
GF35HO2RS	4	Housing for GF-35	1
GE35HO2RS	5	Spherical-plain-bearing GE 35 HO 2RS	2
MDL-090346	6	Rod - Hard Chrome Shaft 55 - HAC55 L=0.806	1
GIHRK35HO2RS	7	Housing for GIHR-K 35	1
DS3908013055	8	Cylinder-head C2/C3 - Bore 80 - Rod 55	1
ASU5565653T38	9	Scraper 55 x 65.6 x 5.3 - T38	1
SA55709UN	10	Rod-seal 55 x 70 x 9 UN	1
SAS5570163	11	Rod-seal 55 x 70.1 x 6.3	1
GRI556097	12	Guide-ring 55 x 60 x 9.7	2
BU6922534	13	Backup-ring 69.22 x 5.34 x 1.52	1
OR6922533P001	14	O-ring 69.22 x 5.33	1
OR8060262P001	15	O-ring 80.60 x 2.62	1
DS3908004	16	Cylinder-piston C3 - Bore 80	1
ZAS8064563	17	Piston-stepseal 80 x 64.5 x 6.3	1
GRE807515	18	Wear-ring 80 x 75 x 15	2
OR346026290P001	19	O-ring 34.60 x 2.62 - 90'-shore	1
DS2909015	20	Swage ring C25 Bore 90/100	1
SP08M	21	Dust plug outer thread 1/2" BSP	2