

All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask						
Above	-	6	30	120	400	1000
Up to	6	30	120	400	1000	2500
Tol.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2

©	Ø 0.1	A
---	-------	---


Angles ± 2°
 Drilled holes +0.25 -0
 All sharp edges removed R0.2 +0.2
 Inside and Outside deburred
 Surface roughness max. Ra 3.2

Stroke	Tol. +1.8 -1.6
--------	-------------------

	Drawn		Pressure	250 bar
	Cust. Ref.		Weight	28.13 kg
Item	CFGCY0079601	Reference	2501405	
Description	C2S.80.56.570 Bush/60~GK40DO			
Finish	Primer			



CFGCY0079601 - C2S.80.56.570 Bush/60~GK40DO

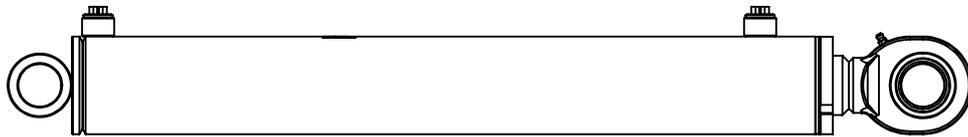

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 92 x 80 ST52-H10 CB 92-6H10 L=0.689	1
LSN08E	2	Welding-stud 1/2" BSP	2
DC3908001	3	Endcap C2/C3 - Bore 80	1
	4	Bush 60 x 40 L=55	1
MDL-090346	5	Rod - Hard Chrome Shaft 56 - HAC56 L=0.714	1
GK40DO	6	Spherical-bearing GK 40 DO	1
DS3908013056	7	Cylinder-head C2/C3 - Bore 80 - Rod 56	1
ASU5666653T38	8	Scraper 56 x 66.6 x 5.3 - T38	1
SA5671114UN	9	Rod-seal 56 x 71 x 11.4 UN	1
GRI566197	10	Guide-ring 56 x 61 x 9.7	2
BU6922534	11	Backup-ring 69.22 x 5.34 x 1.52	1
OR6922533P001	12	O-ring 69.22 x 5.33	1
OR8060262P001	13	O-ring 80.60 x 2.62	1
DS2908004	14	Cylinder-piston C2 - Bore 80	1
ZA8060224DBM	15	Piston-seal 80 x 60 x 22.4/6.3	1
OR314226290P001	16	O-ring 31.42 x 2.62 - 90'-shore	1
DS2908015	17	Swage ring C25 Bore 80	1
SP08M	18	Dust plug outer thread 1/2" BSP	2