



All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters $\text{Ⓢ} \text{ } \phi \text{ } 0.1 \text{ } \text{A}$	Angles $\pm 2^\circ$ Drilled holes $+0.25 -0$ All sharp edges removed $R0.2 +0.2$ Inside and Outside deburred Surface roughness max. $Ra \text{ } 3.2$	Stroke Tol. $+1.8$ $-1.6$
Up to	6	30	120	400	1000	2500			
Tol.	$\pm 0.1$	$\pm 0.2$	$\pm 0.3$	$\pm 0.5$	$\pm 0.8$	$\pm 1.2$			

	Drawn		Pressure	250 bar
	Cust. Ref.	Zandklep Koop   24.3.1087.00	Weight	3.27 kg
Item	CFGCY0079556	Reference	0323258	
Description	C2S.30.20.200 Bus/40~Bus/40			
Finish	Primer & RAL7016 Anthracite-grey High-Gloss			



**CFGCY0079556 - C2S.30.20.200 Bus/40~Bus/40**

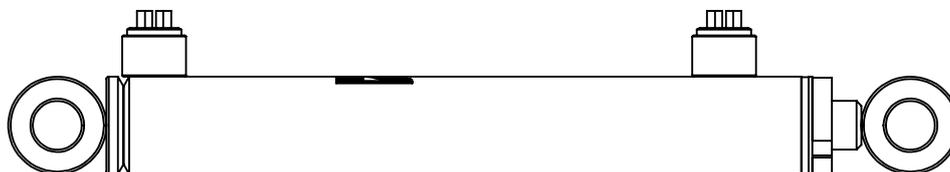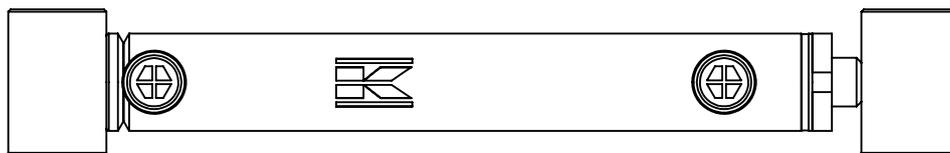

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 40 x 30 ST52-H10 CB 40-5H10 L=0.281	1
LSN06E	2	Welding-stud 3/8" BSP	2
DC3903001	3	Endcap C2/C3/P2 - Bore 30	1
	4	Bush 40 x 20 L=60	1
MDL-090346	5	Rod - Hard Chrome Shaft 20 - HAC20 L=0.300	1
	6	Bush 40 x 20 L=60	1
DS2903013020	7	Cylinder-head C2 - Bore 30 - Rod 20 - 250 bar	1
ASU2028653	8	Scraper 20 x 28.6 x 5.3	1
SA202857UN	9	Rod-seal 20 x 28 x 5.7 UN	1
BU2507262	10	Backup-ring 25.86 x 2.18 x 1.14	1
OR250726290P001	11	O-ring 25.07 x 2.62 - 90'-shore	1
OR2982262	12	O-ring 29.82 x 2.62	1
DS2903004	13	Cylinder-piston C2 - Bore 30	1
ZA3021135DBM	14	Piston-seal 30 x 21 x 13.5/2.1	1
MDL-020787	15		1
SLBMM1215	16	Seallock-nut M12x1.5 Ø30mm	1
SP06M	17	Dust plug outer thread 3/8" BSP	2