



All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters $\text{© } \text{Ø } 0,1 \text{ A}$	Angles $\pm 2^\circ$ Drilled holes $+0,25 -0$ All sharp edges removed $R0,2 +0,2$ Inside and Outside deburred Surface roughness max. $Ra 3,2$	Stroke
Up to	6	30	120	400	1000	2500			Tol. +1,8
Tol.	$\pm 0,1$	$\pm 0,2$	$\pm 0,3$	$\pm 0,5$	$\pm 0,8$	$\pm 1,2$			-1,6

	Drawn		Pressure	250 bar
	Cust. Ref.		Weight	13.74 kg
Item	CFGCY0079366	Reference	0603404	
Description	C2S.80.50.175 GF30DO~M30x3.5			
Finish	Primer & RAL9005 Jet-black High-Gloss			



CFGCY0079366 - C2S.80.50.175 GF30DO~M30x3.5

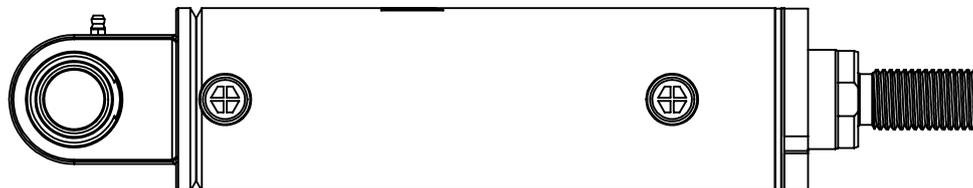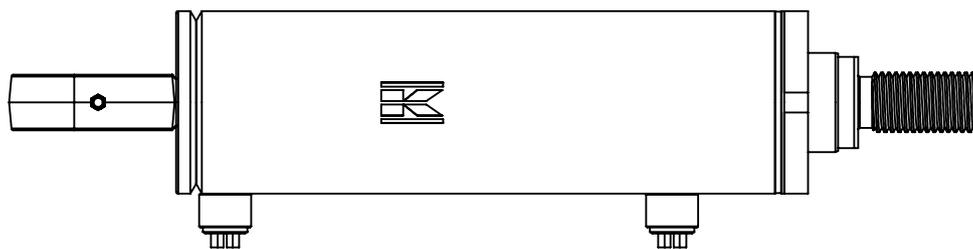

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 92 x 80 ST52-H10 CB 92-6H10 L=0.294	1
LSN06E	2	Welding-stud 3/8" BSP	2
DC3908001	3	Endcap C2/C3 - Bore 80	1
GF30DO	4	Spherical-bearing GF 30 DO	1
MDL-090346	5	Rod - Hard Chrome Shaft 50 - HAC50 L=0.389	1
DS2908013050	6	Cylinder-head C2 - Bore 80 - Rod 50 - 250 bar	1
ASU5060653	7	Scraper 50 x 60.6 x 5.3	1
SA506010UN	8	Rod-seal 50 x 60 x 10 UN	1
BU6922534	9	Backup-ring 69.22 x 5.34 x 1.52	1
OR6922533P001	10	O-ring 69.22 x 5.33	1
OR8060262P001	11	O-ring 80.60 x 2.62	1
DS2908004	12	Cylinder-piston C2 - Bore 80	1
ZA8060224DBM	13	Piston-seal 80 x 60 x 22.4/6.3	1
OR314226290P001	14	O-ring 31.42 x 2.62 - 90'-shore	1
DS2908015	15	Swage ring C25 Bore 80	1
SP06M	16	Dust plug outer thread 3/8" BSP	2