


All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters © Ø 0.1 A	Angles ± 2° Drilled holes +0.25 -0 All sharp edges removed R0.2 +0.2 Inside and Outside deburred Surface roughness max. Ra 3.2	Stroke Tol. +1.8 -1.6
Up to	6	30	120	400	1000	2500			
Tol.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2			

	Drawn		Pressure	250 bar
	Cust. Ref.	Cabinebordes HD2944 Koop 24.3.2024	Weight	10.54 kg
Item	CFGCY0079568	Reference	0323258	
Description	C2S.60.35.220 GF35DO~GF35DO			
Finish	Primer & RAL7016 Anthracite-grey High-Gloss			



CFGCY0079568 - C2S.60.35.220 GF35DO~GF35DO

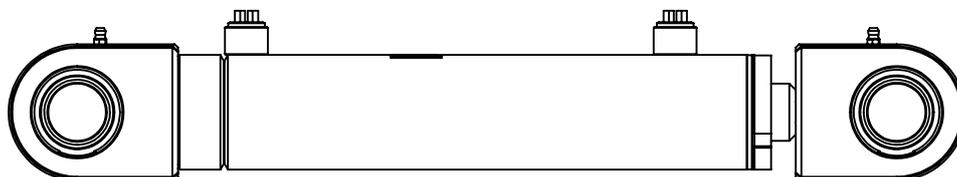

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 70 x 60 ST52-H10 CB 70-5H10 L=0.321	1
LSN06E	2	Welding-stud 3/8" BSP	2
DS3906001A	3	Reinforced Endcap C2/C3 - Bore 60	1
GF35DO	4	Spherical-bearing GF 35 DO	2
MDL-090346	5	Rod - Hard Chrome Shaft 35 - HAC35 L=0.344	1
DS2906013035	6	Cylinder-head C2 - Bore 60 - Rod 35 - 250 bar	1
SA354510UN	7	Rod-seal 35 x 45 x 10 UN	1
BU5357353	8	Backup-ring 53.57 x 3.53 x 1.02	1
OR5357353	9	O-ring 53.57 x 3.53	1
OR5842262	10	O-ring 58.42 x 2.62	1
DS2906004	11	Cylinder-piston C2 - Bore 60	1
ZA6044184DBM	12	Piston-seal 60 x 44 x 18.4/6.3	1
OR250726290P001	13	O-ring 25.07 x 2.62 - 90'-shore	1
DS2906015	14	Swage ring C25 Bore 60/63/70	1
SP06M	15	Dust plug outer thread 3/8" BSP	2