


All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask						
Above	-	6	30	120	400	1000
Up to	6	30	120	400	1000	2500
Tol.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2

All diameters	Angles ± 2° Drilled holes +0.25 -0	Stroke
© Ø 0.1 A	All sharp edges removed R0.2 +0.2	Tol. +1.8
	Inside and Outside deburred	-1.6
	Surface roughness max. Ra 3.2	

	Drawn		Pressure	250 bar
	Cust. Ref.		Weight	12.29 kg
Item	CFGCY0079490	Reference	0327049	
Description	C2P.70.40.175 Bus/50~GF30DO			
Finish	Primer & RAL7016 Anthracite-grey High-Gloss			

CFGCY0079490 - C2P.70.40.175 Bus/50~GF30DO

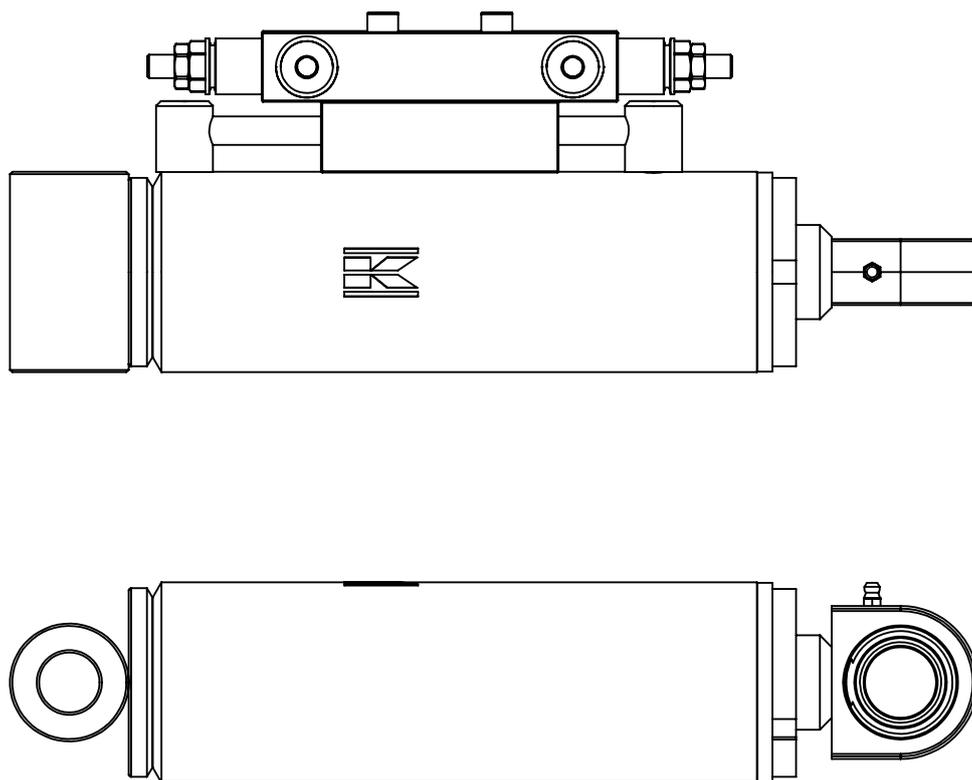

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 85 x 70 ST52-H8 CB 85-7.5H8 L=0.261	1
LSN12MM90	2	Welding stud 12mm 90 degrees	2
DC3907001	3	Endcap C2/C3 - Bore 70	1
	4	Bush 50 x 25.500 L=85	1
MDL-033544	5	Pipe connection Ø12 x 1,5 to Valve Endcap-side - WLHL1215 L=0.060 mtr	1
MDL-033545	6	Pipe connection Ø12 x 1,5 to Valve Rod-side - WLHL1215 L=0.042 mtr	1
1003511090	7	Base plate 1003511090	1
FPO50D382F35	8	Counter balance Dual 3/8" Gasket mounted	1
912840109	9	Hex sock hd Cyl. bolt M8x40 DIN 912 / ISO 4762 Zinc-plated	4
VSR06WD	10	End Plug (CS) R3/8 VS-R06-WD	2
MDL-090346	11	Rod - Hard Chrome Shaft 40 - HAC40 L=0.284	1
GF30DO	12	Spherical-bearing GF 30 DO	1
DS2907013040	13	Cylinder-head C2 - Bore 70 - Rod 40 - 250 bar	1
DS2907004S	14	Cylinder-piston C2P - Bore 70	1
ZAS705942T764	15	Piston stepseal 70 x 59 x 4.2	1
OR250726290P001	16	O-ring 25.07 x 2.62 - 90'-shore	1
GRE706597	17	Wear-ring 70 x 65 x 9.7	1
91666B	18	Grub screw M6x6 45H DIN 916	1