

All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask						
Above	-	6	30	120	400	1000
Up to	6	30	120	400	1000	2500
Tol.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2


©	∅ 0.1	A
---	-------	---

Angles ± 2° Drilled holes +0.25 -0
All sharp edges removed R0.2 +0.2
Inside and Outside deburred
Surface roughness max. Ra 3.2

Stroke
Tol. +1.8
-1.6

	Drawn		Pressure	250 bar
	Cust. Ref.		Weight	20.95 kg
Item	CFGCY0079628	Reference	0123422	
Description	C2S.80.40.500 Boden/Bohrung-Buchse/50			
Finish	Primer			

CFGCY0079628 - C2S.80.40.500 Boden/Bohrung~Buchse/50

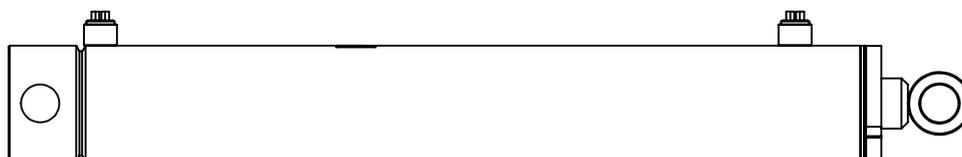

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 92 x 80 ST52-H10 CB 92-6H10 L=0.619	1
LSN06E	2	Welding-stud 3/8" BSP	2
MDL-011641	3	Machined Endcap/Circular with Hole 30.2mm - Bore 80	1
MDL-090346	4	Rod - Hard Chrome Shaft 40 - HAC40 L=0.650	1
	5	Bush 50 x 30 L=55	1
DS2908013040	6	Cylinder-head C2 - Bore 80 - Rod 40 - 250 bar	1
ASU4048653	7	Scraper 40 x 48.6 x 5.3	1
SA405010UN	8	Rod-seal 40 x 50 x 10 UN	1
BU6922534	9	Backup-ring 69.22 x 5.34 x 1.52	1
OR6922533P001	10	O-ring 69.22 x 5.33	1
OR8060262P001	11	O-ring 80.60 x 2.62	1
DS2908004	12	Cylinder-piston C2 - Bore 80	1
ZA8060224DBM	13	Piston-seal 80 x 60 x 22.4/6.3	1
OR314226290P001	14	O-ring 31.42 x 2.62 - 90'-shore	1
DS2908015	15	Swage ring C25 Bore 80	1
SP06M	16	Dust plug outer thread 3/8" BSP	2