
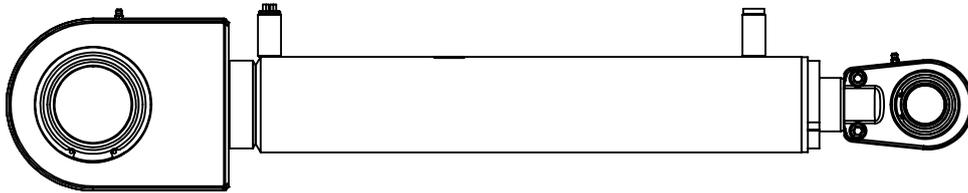


All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters $\text{© } \phi 0.1 \text{ A}$	Angles $\pm 2^\circ$ Drilled holes $+0.25 -0$ All sharp edges removed $R0.2 +0.2$ Inside and Outside deburred Surface roughness max. $Ra 3.2$	Stroke Tol. $+1.8$ -1.6
Up to	6	30	120	400	1000	2500			
Tol.	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2			

	Drawn		Pressure	320 bar
	Cust. Ref.	RWE $\phi 80/56$ hub 450	Weight	46.24 kg
Item	CFGCY0079616	Reference	0142439	
Description	C3S.80.56.450 GF80DO2RS~GIHRK40DO			
Finish	Primer & RAL9005 Jet-black Matt			

CFGCY0079616 - C3S.80.56.450 GF80DO2RS~GIHRK40DO

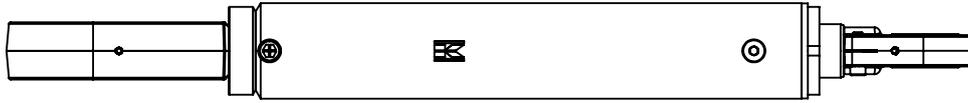

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 100 x 80 ST52-H8 CB 100-10H8 L=0.574	1
LSN0645	2	Welding-stud 3/8" BSP L=45mm	2
DS3908001A	3	Reinforced Endcap C2/C3 - Bore 80	1
GF80DO2RS	4	Housing for GF-80	1
GE80DO2RS	5	Spherical-plain-bearing GE 80 DO 2RS	1
MDL-090346	6	Rod - Hard Chrome Shaft 56 - HAC56 L=0.643	1
GIHRK40DO	7	Spherical-bearing GIHR-K 40 DO	1
DS3908013056	8	Cylinder-head C2/C3 - Bore 80 - Rod 56	1
ASU5666653T38	9	Scraper 56 x 66.6 x 5.3 - T38	1
SA5671114UN	10	Rod-seal 56 x 71 x 11.4 UN	1
SAS5671163	11	Rod-seal 56 x 71.1 x 6.3	1
GRI566197	12	Guide-ring 56 x 61 x 9.7	2
BU6922534	13	Backup-ring 69.22 x 5.34 x 1.52	1
OR6922533P001	14	O-ring 69.22 x 5.33	1
OR8060262P001	15	O-ring 80.60 x 2.62	1
DS3908004	16	Cylinder-piston C3 - Bore 80	1
ZAS8064563	17	Piston-stepseal 80 x 64.5 x 6.3	1
GRE807515	18	Wear-ring 80 x 75 x 15	2
OR346026290P001	19	O-ring 34.60 x 2.62 - 90'-shore	1
DS2909015	20	Swage ring C25 Bore 90/100	1
VSR06WD	21	End Plug (CS) R3/8 VS-R06-WD	1
SP06M	22	Dust plug outer thread 3/8" BSP	1