


All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters $\text{Ø } 0.1 \text{ A}$	Angles $\pm 2^\circ$ Drilled holes $+0.25 -0$ All sharp edges removed R0.2 $+0.2$ Inside and Outside deburred Surface roughness max. Ra 3.2	Stroke
Up to	6	30	120	400	1000	2500			Tol. $+1.8$
Tol.	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2			-1.6

	Drawn		Pressure	250 bar
	Cust. Ref.	12 m T-Rubber Klappzylinder	Weight	84.49 kg
Item	CFGY0079566	Reference	0158129	
Description	C2S.140.60.800 GK60DO~M58x1,5			
Finish	Primer & RAL9005 Jet-black High-Gloss			



CFGCY0079566 - C2S.140.60.800 GK60DO~M58x1,5

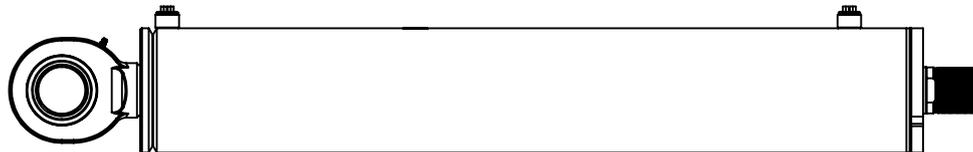

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 160 x 140 ST52-H8 CB 160-10H8 L=0.968	1
LSN08E	2	Welding-stud 1/2" BSP	2
DC3914001	3	Endcap C2/C3 - Bore 140	1
GK60DO	4	Spherical-bearing GK 60 DO	1
MDL-090346	5	Rod - Hard Chrome Shaft 60 - HAC60 L=1.054	1
DS3914013060	6	Cylinder-head C2/C3 - Bore 140 - Rod 60	1
ASU6070653T38	7	Scraper 60 x 70.6 x 5.3 - T38	1
SA607010UN	8	Rod-seal 60 x 70 x 10 UN	1
GRI606597	9	Guide-ring 60 x 65 x 9.7	2
BU12954534	10	Backup-ring 129.54 x 5.34 x 1.52	1
OR12954533P001	11	O-ring 129.54 x 5.33	1
OR137262P001	12	O-ring 137 x 2.62	1
DS2914004	13	Cylinder-piston C2 - Bore 140	1
ZA140115254DBM	14	Piston-seal 140 x 115 x 25.4/6	1
OR503935390P001	15	O-ring 50.39 x 3.53 - 90'-shore	1
916816	16	Grub screw M8x16 45 H zinc-pl.	1
SP08M	17	Dust plug outer thread 1/2" BSP	2