
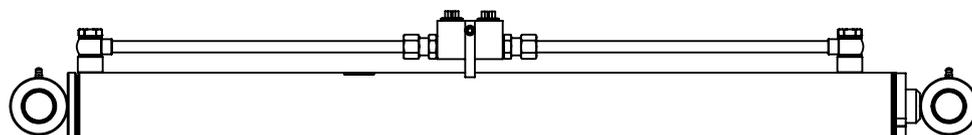


CFGCY0079583 - C2S.60.35.750 Buchse/60~Buchse/60



PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 70 x 60 ST52-H10 CB 70-5H10 L=0.851	1
LSN06E	2	Welding-stud 3/8" BSP	2
DC3906001	3	Endcap C2/C3 - Bore 60	1
	4	Bush 60 x 34 L=80	1
ZB303430BDA	5	Bearing-bush Permaglide P2 - d=30, D=34, L=30 (low-maintenance)	4
MDL-090346	6	Rod - Hard Chrome Shaft 35 - HAC35 L=0.874	1
	7	Bush 60 x 34 L=80	1
DS2906013035	8	Cylinder-head C2 - Bore 60 - Rod 35 - 250 bar	1
SA354510UN	9	Rod-seal 35 x 45 x 10 UN	1
BU5357353	10	Backup-ring 53.57 x 3.53 x 1.02	1
OR5357353	11	O-ring 53.57 x 3.53	1
OR5842262	12	O-ring 58.42 x 2.62	1
DS2906004	13	Cylinder-piston C2 - Bore 60	1
ZA6044184DBM	14	Piston-seal 60 x 44 x 18.4/6.3	1
OR250726290P001	15	O-ring 25.07 x 2.62 - 90'-shore	1
DS2906015	16	Swage ring C25 Bore 60/63/70	1
SBB0612400	17	Banjo 3/8 x 12mm+pipe 400mm SBB0612400	2
HBB06	18	Banjo bolt 3/8 BSP HBB 06	2
TT06	19	Multi Seal 3/8" TT 06	4
VRDE015A	20	Pilot operated check valve Dual 3/8"	1
SP06M	21	Dust plug outer thread 3/8" BSP	2
MDL-033682	22	Support Strip for VRDE015A - PL103 L=0.059 mtr	1
912645	23	Hex sock hd Cyl. bolt M6x45 zinc-plated DIN 912 / ISO 4762	1
9346A	24	Nut Hex. M6 zinc-plated DIN 934	1
GN61180	25	Grease nipple M6 - 180°	2