



All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask

Above	-	6	30	120	400	1000	All diameters $\text{Ⓢ} \text{ } \phi \text{ } 0.1 \text{ } \text{ } A$	Angles $\pm 2^\circ$ Drilled holes $+0.25 -0$ All sharp edges removed $R0.2 +0.2$ Inside and Outside deburred Surface roughness max. $Ra \text{ } 3.2$	Stroke
Up to	6	30	120	400	1000	2500			Tol. $+1.8$
Tol.	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2			-1.6

	Drawn		Pressure	250 bar
	Cust. Ref.	GPS mast cilinder HD2944 Koop 24	Weight	11.25 kg
Item	CFGY0079561	Reference	0323258	
Description	C2S.60.30.340 GK35DO~GK35DO			
Finish	Primer & RAL7016 Anthracite-grey High-Gloss			



CFGCY0079561 - C2S.60.30.340 GK35DO~GK35DO

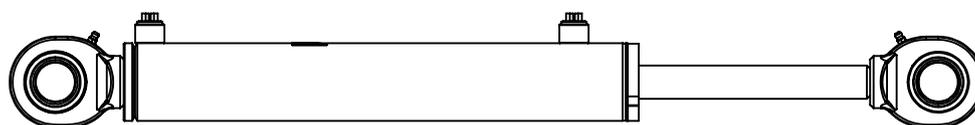

PARTNO	POS.	DESCRIPTION	QTY.
MDL-090348	1	Tube - Cylinder tube 70 x 60 ST52-H10 CB 70-5H10 L=0.441	1
LSN06E	2	Welding-stud 3/8" BSP	2
DC3906001	3	Endcap C2/C3 - Bore 60	1
GK35DO	4	Spherical-bearing GK 35 DO	2
MDL-090346	5	Rod - Hard Chrome Shaft 30 - HAC30 L=0.656	1
DS2906013030	6	Cylinder-head C2 - Bore 60 - Rod 30 - 250 bar	1
ASU3038653	7	Scraper 30 x 38.6 x 5.3	1
SA30407UN	8	Rod-seal SA 30 x 40 x 7 UN	1
BU5357353	9	Backup-ring 53.57 x 3.53 x 1.02	1
OR5357353	10	O-ring 53.57 x 3.53	1
OR5842262	11	O-ring 58.42 x 2.62	1
DS2906004	12	Cylinder-piston C2 - Bore 60	1
ZA6044184DBM	13	Piston-seal 60 x 44 x 18.4/6.3	1
OR250726290P001	14	O-ring 25.07 x 2.62 - 90'-shore	1
DS2906015	15	Swage ring C25 Bore 60/63/70	1
SP06M	16	Dust plug outer thread 3/8" BSP	2